



Least-squares migration with angle gathers

A.A. Valenciano*, M. Orlovich, E. Klochikhina and N. Chemingui, PGS

Copyright 2019, SBGf - Sociedade Brasileira de Geofísica

This paper was prepared for presentation during the 16th International Congress of the Brazilian Geophysical Society held in Rio de Janeiro, Brazil, 19-22 August 2019.

Contents of this paper were reviewed by the Technical Committee of the 16th International Congress of the Brazilian Geophysical Society and do not necessarily represent any position of the SBGf, its officers or members. Electronic reproduction or storage of any part of this paper for commercial purposes without the written consent of the Brazilian Geophysical Society is prohibited.

Abstract

Least-Squares Migration (LSM) aims to produce high-resolution images useful for reservoir characterization. The method reduces the amplitude variations due to migration operator limitations or uneven illumination created by incomplete acquisition or a complex model. When posed as an inversion in the angle domain, LSM compensates angle gather amplitudes. This angle extension requires an explicit computation of the Hessian matrix or Point Spread Functions (PSFs) in the angle domain. The algorithm enables the application of a chain of operators and their adjoints for modeling, migration, and angle generation to a grid of point scatterers distributed throughout the model. The angular reflectivity is recovered by solving a linear system of equations that deconvolves the multidimensional PSF from the migrated image gathers. This efficient procedure effectively incorporates the spatial variability of the PSF. The results from the Sigsbee2A model and a multisensor streamer survey from the Central North Sea show how LSM improves the image resolution and Amplitude Versus Angle (AVA) reliability.

Introduction

Seismic image amplitudes are affected by the earth model, acquisition parameters, and imaging operators. The bias is particularly prominent in the presence of complex earth models, as it can impact the interpretation of amplitude variability with angle. Provided with an accurate velocity model, migration produces flat angle gathers. Abrupt changes in amplitude with angle are typically indicative of illumination problems.

Seismic imaging operators (i.e. modeling/migration) are non-unitary (Claerbout, 1992), if L is a modeling operator, and L' is its adjoint (migration), their product $H=L'L$ is not the identity matrix; H is a Hessian matrix, whose elements are the point spread functions (PSF). As a result, depth migrated images are blurred, and AVA fidelity is often not preserved. This can change depending on the migration operators. Wave-equation one-way (WEM), two-way (RTM) or asymptotic (Kirchhoff) handle the amplitudes differently and have different degrees of kinematic accuracy (Gray et al., 2001, Zhang et al., 2005). Asymptotic Kirchhoff operators are closer to unitary (Bleistein, 1987) and are trusted for AVA interpretation in spite of their kinematic limitations in high-contrast and rapidly varying earth models. Full Waveform Inversion

(FWI) increases our ability to estimate more detailed earth models. Consequentially, we should use more accurate wave-equation operators to preserve image amplitudes.

Here, we discuss a least-squares migration (LSM) solution that compensates depth migrated images to account for uneven illumination and image blurring, as well as correcting angle gather amplitudes. The algorithm assumes that the background earth model is accurate and poses the estimation of the reflectivity as a least-squares inversion problem in the reflection angle domain. It explicitly computes the Hessian matrix with an angle dimension by applying a sequence of operators (modeling/migration and offset to angle transforms) to a grid of point scatterers distributed throughout the model space. The method assumes a degree of stationarity of the PSFs as they are later interpolated to fully populate the image space. The final step solves a linear system where the migrated images and the PSFs are the known quantities, and the angular reflectivity is unknown. Results from the Sigsbee2A model and a multisensor field survey from the central North Sea demonstrate the benefits of the method.

Least-squares Migration with gathers

The least-squares migration algorithm can be summarized as follows: given a linear modeling operator L and a reflectivity model m , compute synthetic data d using the relation $d = Lm$, then form a quadratic cost function

$$S(m) = \|d - d_{obs}\|^2 = \|Lm - d_{obs}\|^2, \quad (1)$$

d_{obs} is the field data, and seek a reflectivity model that minimizes it.

A closed form solution for the least-squares estimate of m is given by:

$$\hat{m} = (L'L)^{-1} L'd_{obs} \quad (2)$$

$$\hat{m} = H^{-1} m_{mig}, \quad (3)$$

where the migration operator L' is the adjoint of the modeling operator L , m_{mig} is the migrated image, and H is the Hessian matrix whose elements are the PSFs. Equation 3 implies that the reflectivity can be estimated by a matrix-vector multiplication of the inverse of the Hessian (H^{-1}) by the migrated image (m_{mig}). However, it is not numerically feasible to compute the inverse Hessian matrix for most field data applications. Alternately, a low-rank approximation to the inverse of the Hessian has been proposed (e.g. Guitton, 2004).

A better approach is to explicitly compute the Hessian matrix and estimate the reflectivity (Valenciano, 2008) rather than approximating the matrix inverse. This solution is obtained by solving the linear system:

$$\mathbf{H}\hat{\mathbf{m}} = \mathbf{m}_{mig}, \quad (4)$$

using an iterative inversion algorithm (e.g. conjugate gradients). To generalize equation 4, and invert for angular reflectivity, we need to define the Hessian in the prestack image space.

Expanding Hessian dimensionality to the angle domain

Valenciano and Biondi (2006) defined the Hessian matrix in the prestack image domain as a chain of operators from the subsurface offset $\mathbf{h} = (h_x, h_y)$ to the reflection and azimuth angle $\Theta = (\theta, \alpha)$:

$$\mathbf{H}(\mathbf{x}, \Theta, \mathbf{x}', \Theta') = \mathbf{T}'(\Theta, \mathbf{h})\mathbf{H}(\mathbf{x}, \mathbf{h}, \mathbf{x}', \mathbf{h}')\mathbf{T}(\Theta', \mathbf{h}') \quad (5)$$

where the operator \mathbf{T} defines the transformation from reflection and azimuth angle to subsurface offset (Sava and Fomel, 2003). The approach of Valenciano and Biondi (2006) can be applied to any prestack volume where angle gathers are produced from direct binning using Poynting Vectors (Yoon and Marfurt, 2006), or extended imaging conditions (Sava and Fomel, 2005). After computing the angle domain Hessian, the linear system from equation 4 can be expanded to estimate the least-squares angular reflectivity (Valenciano 2008):

$$\mathbf{H}(\mathbf{x}, \Theta, \mathbf{x}', \Theta')\hat{\mathbf{m}}(\mathbf{x}, \Theta) = \mathbf{m}_{mig}(\mathbf{x}, \Theta). \quad (6)$$

Here, we compute the Hessian matrix in the angle domain by applying the sequence of operators from equation 5 to a grid of point scatterers distributed throughout the model space. The spacing of the point scatters is controlled by the acquisition geometry, medium velocity, and imaging frequency.

The Sigsbee model

The Sigsbee2A model (Figure 1a) is ideal for illustrating the variable illumination on angle gathers. We generated synthetic data with constant amplitude angle gathers (i.e. no AVA). As expected, the migration (WEM) angle gathers (Figure 1b) show uneven illumination noticeably under the salt. In contrast, the LSM angle gathers (Figure 1c) show the expected AVA response in the sediments, and less variability than the conventional migration below the salt. Figure 1d shows a comparison of the amplitudes extracted in the red and green circles from figures 1b and 1c. The LSM produces constant amplitude for all angles, as expected.

Field data from the North Sea

A 3D narrow-azimuth multisensor streamer dataset from the Central North Sea (Viking Graben) further illustrates the advantages of LSM. Here, a complex overburden (high-velocity bodies: “V bright”) produces uneven illumination at the reservoir level. Figure 2 shows a comparison of the results from both the migration (WEM) and LSM. The LSM improves resolution (Figure 2), enabling discrimination of the reservoir from the background. Figures 2e and 2f show angle gathers at the target and their corresponding AVA response. The illumination compensation with LSM changes the AVA

trend as well as the interpretation at the reservoir (Figure 2g). The LSM AVA trend matches the response predicted by AVA modeling from a nearby well.

Conclusions

We have presented a wave-equation LSM solution that produces reliable AVA responses in complex media. Synthetic and field data examples show improvement after LSM in image resolution and AVA consistency. We showed on data from the Central North Sea that the LSM illumination compensation can change the AVA interpretation at the reservoir level. We conclude that LSM is a robust solution, producing volumes of angular reflectivity for reservoir characterization.

Acknowledgments

We thank PGS MultiClient for permission to use the field data. We also thank AkerBP for the interpretation insights. We appreciate the assistance of Øystein Korsmo to make the field data available and for fruitful discussions.

References

- Bleistein, N. [1987] On the imaging of reflectors in the earth. *Geophysics*, 52(7), 931–942.
- Claerbout, J.F. [1992] *Earth soundings analysis, processing versus inversion*. Blackwell Scientific Publications.
- Gray S.H., Etgen J., Dellinger J. and Whitmore D. [2001] Seismic migration problems and solutions. *Geophysics*, 66(5), 1622-1640.
- Guitten, A. [2004] Amplitude and kinematic corrections of migrated images for nonunitary imaging operators. *Geophysics*, 69(4), 101-1024.
- Sava, P. and Fomel S. [2003] Angle-domain common-image gathers by wavefield continuation methods. *Geophysics*, 68(3), 1065-1074.
- Sava P. and Fomel S. [2005] Time-shift imaging condition. 85th SEG Technical Program, Expanded Abstracts, 1850-1853.
- Valenciano, A.A. and Biondi, B.L. [2006] Wave-Equation Angle-Domain Hessian. 68th EAGE Conference & Exhibition, Expanded Abstracts, G042.
- Valenciano, A.A. [2008] Imaging by wave-equation inversion. PhD thesis, Stanford University.
- Yoon K. and Marfurt K. J. [2006] Reverse-time migration using the Poynting vector. *Exploration Geophysics*, 37(1), 102-107.
- Zhang Y., Zhang G. and Bleistein N. [2005] Theory of true-amplitude one-way wave equations and true-amplitude common-shot migration. *Geophysics*, 70(4), E1-E10.

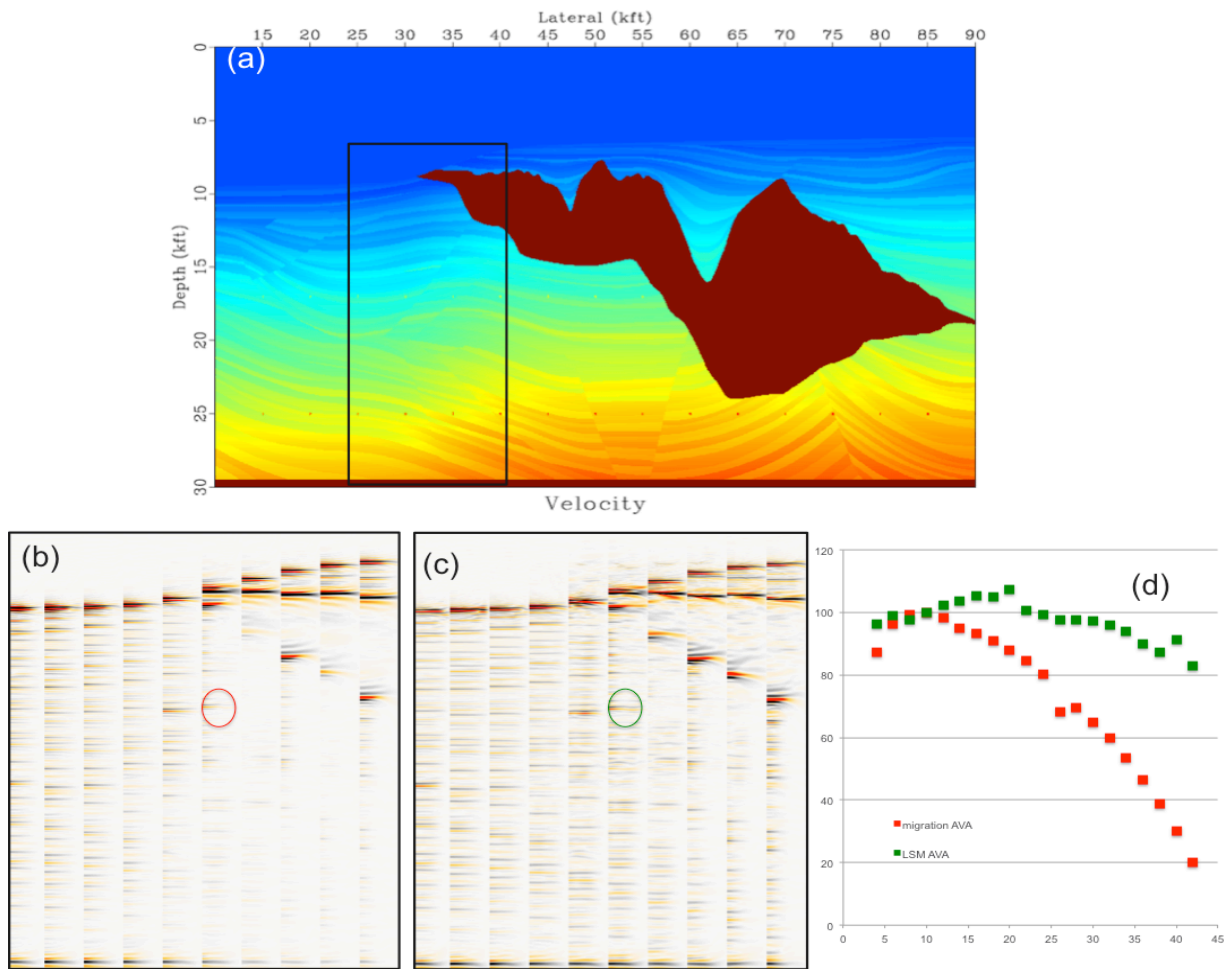


Figure 1 Sigsbee2A: (a) velocity model, (b) Migration (WEM) angle gathers, (c) LSM angle gathers, and (d) AVA comparison at the reflector in the center of the circle. The LSM compensates for uneven illumination underneath the salt body.

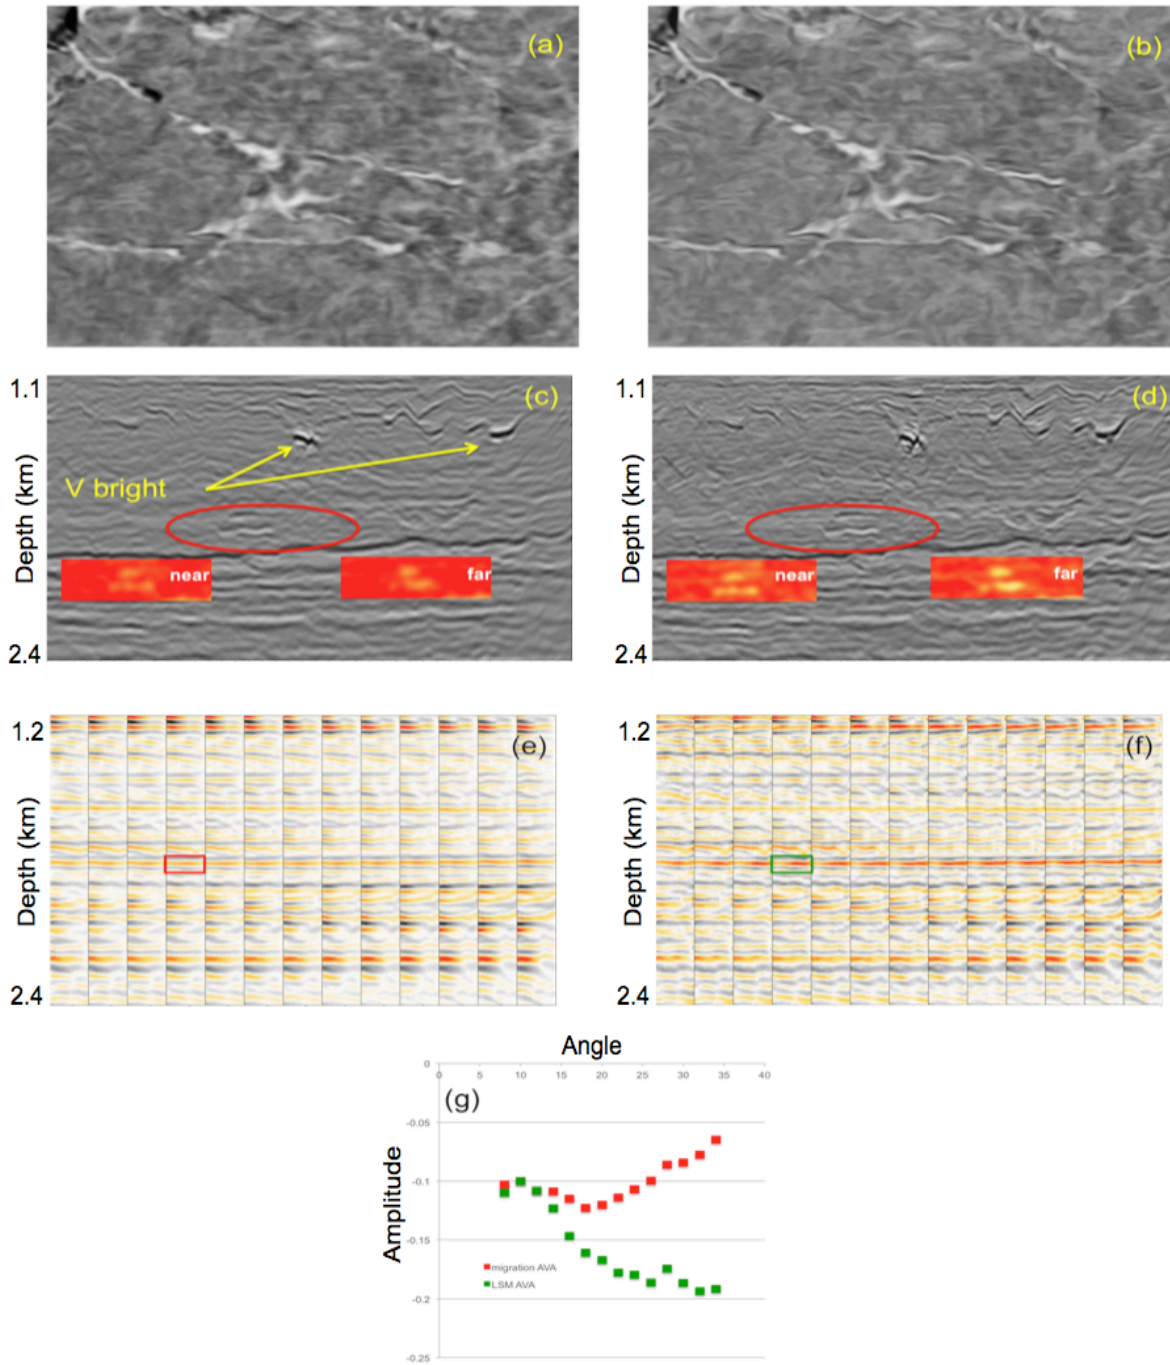


Figure 2 Central North Sea data: (a) Migration (WEM) depth slice, (b) LSM depth slice, (c) Migration inline section, (d) LSM inline section, (e) Migration angle gathers, (f) LSM angle gathers, and (g) AVA comparison at the reservoir depth. The rectangles in color in panels (c) and (d) show the RMS amplitude values inside the red ellipses. Note that the near and far angle stacks better discriminate the reservoir from the background in the LSM data.