



SBGf Conference

18-20 NOV | Rio'25

Sustainable Geophysics at the Service of Society

In a world of energy diversification and social justice

Submission code: 4L9ZMQWA7M

See this and other abstracts on our website: <https://home.sbgf.org.br/Pages/resumos.php>

Interfacial Tension Dynamics in H₂+CO₂/Aqueous Systems: Unlocking Insights for Underground Hydrogen Storage and CO₂ Cushioning

Hamid Esfandiari (The university of Adelaide), Alireza Safari, Aliakbar Hassanpourouzband, Manouchehr Haghghi, Alireza Keshavarz (The university of Adelaide), Abbas Zeinijahromi

Interfacial Tension Dynamics in H₂+CO₂/Aqueous Systems: Unlocking Insights for Underground Hydrogen Storage and CO₂ Cushioning

Hamid Esfandyari^{a*}, Alireza Safari^b, Aliakbar Hassanpouryouzband^c, Manouchehr Haghghi^a, Alireza Keshavarz^d, Abbas Zeinijahromi^a

^aSchool of Chemical Engineering, Discipline of Mining and Petroleum Engineering, The University of Adelaide, Adelaide, SA, 5005, Australia

^bDepartment of Earth Resources Engineering, Graduate School of Engineering, Kyushu University, 744 Motoooka, Nishi Ward, Fukuoka, Japan

^cGrant Institute, School of Geosciences, University of Edinburgh, West Main Road, Edinburgh, EH9 3FE, United Kingdom

^dPetroleum Engineering Discipline, School of Engineering, Edith Cowan University, Joondalup, WA, Australia

Corresponding author: hamid.esfandiari@adelaide.edu.au

Abstract

Hydrogen (H₂) is a key energy carrier for the energy transition, but large-scale surface storage presents technical and environmental challenges. Underground hydrogen storage (UHS) is a promising alternative, yet the physicochemical interactions governing gas mobility and trapping require further investigation. This study focuses on interfacial tension (IFT) variations in H₂-CO₂-brine systems, elucidating the impact of pressure, temperature, and salinity on gas-liquid and rock-fluid interactions critical for optimizing UHS.

Experimental approaches were employed to measure gas-water interfacial tension ($\gamma_{\text{max-xax}}$), under reservoir conditions. The effects of temperature (20–80°C), pressure (10–100 bar), and gas composition (H₂ and CO₂ mixtures) were systematically analysed in distilled water and formation brine systems to assess their influence on gas storage efficiency and mobility. The study reveals that temperature, pressure, and salinity significantly influence IFT, with distinct trends observed based on gas composition and aqueous phase properties. In pure H₂/distilled water systems, IFT increased with temperature, consistent with enhanced molecular kinetic energy reducing intermolecular cohesion. Conversely, in H₂/formation brine systems, IFT decreased with temperature due to the solubility effects of dissolved salts, which weaken intermolecular forces. Pressure effects were more pronounced in CO₂-containing mixtures, where increasing pressure reduced IFT due to enhanced gas solubility and molecular interactions. Salinity consistently lowered IFT, supporting the "salting-out effect," which reduces gas solubility and modifies gas-liquid interactions. Additionally, CO₂ as a cushion gas played a crucial role in improving hydrogen mobility and storage efficiency by reducing IFT, thereby minimizing capillary trapping and enhancing gas injectivity. The observed nonlinear

pressure dependence at higher CO₂ concentrations underscores the complexity of multiphase interactions in subsurface environments, emphasizing the need for accurate modelling in UHS.

This study provides novel insights into the interfacial behaviour of H₂ and CO₂ mixtures in geological formations, highlighting the critical role of CO₂ in optimizing UHS. The findings contribute to the fundamental understanding of gas-fluid interactions under reservoir conditions and support the development of more efficient hydrogen storage and carbon sequestration strategies.

Keywords: H₂, CO₂, Interfacial tension (IFT), Underground Hydrogen Storage, Cushion gas

1. Introduction

Tackling the pressing challenge of greenhouse gas emissions, particularly those resulting from fossil fuel combustion, is crucial in mitigating global warming and climate change [1]. Renewable energy sources, with hydrogen playing a pivotal role, have gained significant attention as viable solutions [2]. The increasing global energy demand—driven by population growth and industrial expansion—necessitates a transition toward sustainable energy alternatives, including solar, wind, and tidal power [3, 4]. Hydrogen, widely recognized as a clean energy carrier, presents a promising substitute for conventional fossil fuels [5], with projections indicating its potential to fulfill a substantial share of global energy needs by 2050 [6]. The urgency of reducing greenhouse gas emissions, as emphasized by the Paris Agreement, underscores the necessity of shifting toward renewable and clean energy sources like hydrogen [7]. As a result, hydrogen is emerging as a key renewable energy carrier capable of replacing fossil fuels and promoting a sustainable energy future [8]. However, surface-based storage facilities present challenges in offering large-scale and long-term hydrogen storage, making underground hydrogen storage (UHS) in aquifers and depleted hydrocarbon reservoirs a practical alternative [9, 10]. Various petrophysical properties influence gas injection and production in UHS, including rock composition and surface characteristics [11, 12]. Among these, factors such as wettability and interfacial tension play a crucial role in optimizing hydrogen injection and retrieval from underground reservoirs [3, 13, 14].

In underground hydrogen storage (UHS), the incorporation of a cushion gas alongside the primary working gas is essential for stabilizing reservoir pressure and improving storage efficiency [15, 16]. Commonly used cushion gases, such as methane (CH₄) and carbon dioxide (CO₂), each present distinct benefits and challenges [17, 18]. The selection and proportion of cushion gas relative to hydrogen are influenced by key reservoir characteristics, including permeability, wettability, and depth [19, 20]. Among these options, CO₂ is particularly advantageous due to its widespread availability, cost-effectiveness, and compatibility with subsurface storage conditions [21, 22]. Its higher compressibility and density relative to hydrogen make it an effective medium for maintaining reservoir pressure, facilitating the efficient withdrawal of stored hydrogen [23, 24]. Additionally, the use of CO₂ as a cushion gas supports global initiatives aimed at reducing greenhouse gas emissions, further reinforcing its suitability for UHS applications [3, 25]. Beyond its role in hydrogen storage, investigating the

interactions between CO₂, H₂, and mineral surfaces has implications for underground biomethanation.

This approach involves the controlled injection of hydrogen and carbon dioxide into a subsurface reservoir during periods of surplus energy production. Hydrogenotrophic methanogenic archaea present in the aqueous phase of the storage formation then convert part of these gases into methane [26, 27]. During peak energy demand, the methane-rich gas mixture can be extracted and utilized as an energy source. This process parallels the operation of engineered bioreactors, which are increasingly being integrated into existing gas infrastructure to enhance energy storage and distribution efficiency [28, 29].

While extensive data exist on CO₂-brine interfacial tension [25, 30, 31] and some studies have examined H₂-brine interfacial properties [41–43], the influence of interfacial tension in subsurface storage systems involving mixed gases, particularly H₂ and CO₂, remains insufficiently investigated. Limited experimental research has explored the impact of gas mixtures on the interfacial properties of gas-brine systems [32]. Previous studies have reported interfacial tension (IFT) values for pure hydrogen and water under geological storage conditions (e.g., [33, 34]). However, data on the IFT of mixed gas-water systems remain scarce, with only a few recent investigations addressing this topic. For instance, [35] measured the IFT of an (H₂O + CO₂ + H₂) system across a pressure range of 72 to 6500 psi and temperatures between 25 and 175°C using the pendant-drop method. Their findings indicated that increasing pressure and temperature led to a reduction in IFT. Similarly, [36] conducted pendant-drop method experiments to assess the influence of temperature and methane (CH₄) content, as a cushion gas, on the IFT of an H₂-CH₄/brine system at 1000 psi. Their results demonstrated that IFT decreased with increasing temperature and methane concentration, underscoring the role of CH₄ as a cushion gas and its potential implications for caprock integrity and leakage risk.

This study examines the interfacial tension of H₂+CO₂/brine systems under physio-thermal conditions relevant to geological storage. By analyzing the variations in interfacial tension across different gas compositions, specifically H₂ and CO₂, this research provides a detailed assessment of the influence of gas mixtures on gas-brine interfacial behavior.

To conduct this investigation, brine samples were prepared and subjected to interfacial tension measurements using a pendant-drop device under a range of reservoir conditions. This study is distinct in its focus on the interfacial properties of mixed gases (H₂ + CO₂) in brine, an area that has yet to be thoroughly explored. By evaluating interfacial tension across varying pressures, temperatures, and salinity levels, this research offers valuable insights into the role of CO₂ as a cushion gas in underground hydrogen storage (UHS).

Our study provides new experimental IFT data for H₂-CO₂ mixtures under various geo-storage conditions, offering critical insights for industrial-scale hydrogen storage. These findings support the development of simulation models to predict storage performance and flow behaviour, aiding in the effective implementation of underground hydrogen storage projects with CO₂ as a cushion gas.

2. Experimental Methodology

2.1. Materials

High-purity hydrogen (H_2) and carbon dioxide (CO_2) gases (≥ 99.999 wt%) were utilized to create gas mixtures with different mole fractions, formulated as $[(1-x) H_2 + x CO_2]$, where x was set at 0.25, 0.50, and 0.75. To assess the impact of salinity on wettability, experiments were conducted using both distilled water and formation brine. The brine, obtained from a geological formation, was employed in measurements to replicate realistic subsurface conditions [4, 18].

2.2. Methodology

Interfacial tension (IFT) measurements were conducted using the captive drop technique, where the interaction between hydrogen (H_2) and brine was analyzed under varying pressure and temperature conditions. Three key parameters were considered: the inner needle diameter (used as a reference scale for image analysis), the density of the brine, and the density of H_2 at each experimental pressure and temperature. The IFT values were determined using the Young-Laplace capillarity equation and analyzed with ImageJ software. Each experiment was repeated three times, with the mean values reported, ensuring a maximum error margin of approximately $\pm 3\%$ [4, 18]. Prior to conducting the primary experiments with H_2 , nitrogen (N_2) was used to calibrate the experimental setup within the rock/ N_2 /brine system. The measured rock/ N_2 /brine contact angle data closely aligned with previously reported values under comparable conditions [4, 18].

3. Results and discussion

This section presents a detailed evaluation of how the presence of CO_2 in an H_2 mixture affects interfacial tension (IFT) under conditions representative of subsurface storage. The study explores the influence of pressure, temperature, and CO_2 concentration on IFT between the mixed gas phase ($H_2 + CO_2$) and the liquid phase. Gas compositions with CO_2 fractions of 25%, 50%, and 75% were analyzed across a range of conditions relevant to geological storage systems. Understanding these effects is essential, as reservoir depth and petrophysical characteristics can alter the composition of stored gas mixtures [37, 38]. The selected pressure range (10–100 bar) and temperature range (20°C–80°C) were determined based on preliminary experiments and validation studies to ensure the findings accurately represent CO_2 and H_2 behavior in underground hydrogen storage. IFT measurements were conducted using both distilled water and formation brine to assess the role of salinity in gas-liquid interactions.

3.1. The impact of pressure, temperature, and salinity on IFT within 100 % H_2 /water systems

The interfacial tension (IFT) of H_2 with distilled water and formation brine is affected by temperature, salinity, and pressure. As can be seen in the **Figure 1**, the results indicate that temperature plays a significant role in altering the IFT trends for these systems. In the H_2 /distilled water system, IFT increases with temperature, rising from 64.53 mN/m at 20°C to

73.34 mN/m at 80°C at 10 bar, with a similar trend observed at higher pressures. Conversely, in the H₂/formation brine system, IFT decreases with temperature, dropping from 67.11 mN/m at 20°C to 61.61 mN/m at 80°C at 10 bar. This difference is likely due to the interactions between dissolved salts and the gas-liquid interface, which alter the system's interfacial properties.

Pressure, on the other hand, has a minor effect on IFT compared to temperature. At 80°C, the IFT of the H₂/distilled water system slightly decreases from 73.34 mN/m at 10 bar to 69.12 mN/m at 100 bar, while for the H₂/formation brine system, it decreases from 61.61 mN/m at 10 bar to 58.54 mN/m at 100 bar. This marginal pressure dependency is attributed to the relatively small change in H₂ density with increasing pressure at constant temperature. Meanwhile, salinity significantly reduces IFT, as seen in the lower IFT values of H₂/formation brine compared to H₂/distilled water under the same conditions. At 10 bar and 80°C, for instance, the IFT of H₂/distilled water is 73.34 mN/m, whereas it is 61.61 mN/m for H₂/formation brine. These findings highlight that temperature has the most substantial impact on IFT, increasing it in distilled water but decreasing it in formation brine, while salinity plays a crucial role in lowering IFT, which could influence gas mobility in subsurface conditions.

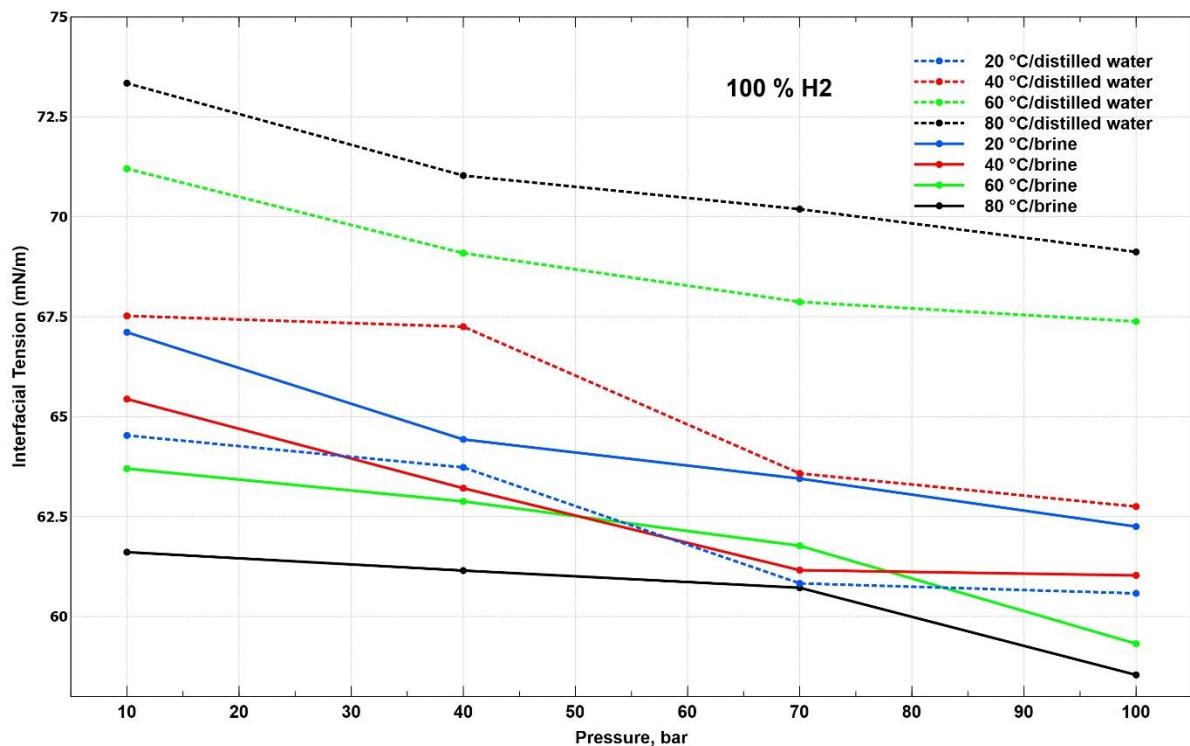


Figure 1: Interfacial tension (IFT) between 100% hydrogen (H₂) and distilled water/brine as a function of pressure and temperature.

3.2. The impact of pressure, temperature, and salinity on IFT within 75 % H₂+25% CO₂/water systems

The interfacial tension (IFT) of a 75% H₂ + 25% CO₂ mixture with distilled water and formation brine is influenced by temperature, salinity, and pressure. As shown in **Figure 2**, the results indicate that temperature plays a significant role in altering IFT trends for these systems. In the

$\text{H}_2 + \text{CO}_2$ /distilled water system, IFT increases with temperature, rising from 60.55 mN/m at 20°C to 70.36 mN/m at 80°C at 10 bar, with a similar trend observed at higher pressures. Conversely, in the $\text{H}_2 + \text{CO}_2$ /formation brine system, IFT decreases with temperature, dropping from 62.21 mN/m at 20°C to 64.82 mN/m at 80°C at 10 bar. This difference can be attributed to the interactions between dissolved salts and the gas-liquid interface, which alter the system's interfacial properties.

Pressure has a relatively minor effect on IFT compared to temperature. At 80°C, the IFT of the $\text{H}_2 + \text{CO}_2$ /distilled water system slightly decreases from 70.36 mN/m at 10 bar to 60.31 mN/m at 100 bar, while for the $\text{H}_2 + \text{CO}_2$ /formation brine system, it decreases from 64.82 mN/m at 10 bar to 52.73 mN/m at 100 bar. This marginal pressure dependency is due to the relatively small change in the $\text{H}_2 + \text{CO}_2$ mixture's density with increasing pressure at constant temperature.

Salinity plays a significant role in reducing IFT, as seen in the lower IFT values for $\text{H}_2 + \text{CO}_2$ /formation brine compared to $\text{H}_2 + \text{CO}_2$ /distilled water under the same conditions. For example, at 80°C and 10 bar, the IFT of $\text{H}_2 + \text{CO}_2$ /distilled water is 70.36 mN/m, whereas it is 64.82 mN/m for $\text{H}_2 + \text{CO}_2$ /formation brine. These findings emphasize that temperature has the most substantial impact on IFT, increasing it in distilled water but decreasing it in formation brine, while salinity significantly lowers IFT. This could have implications for gas mobility in subsurface conditions.

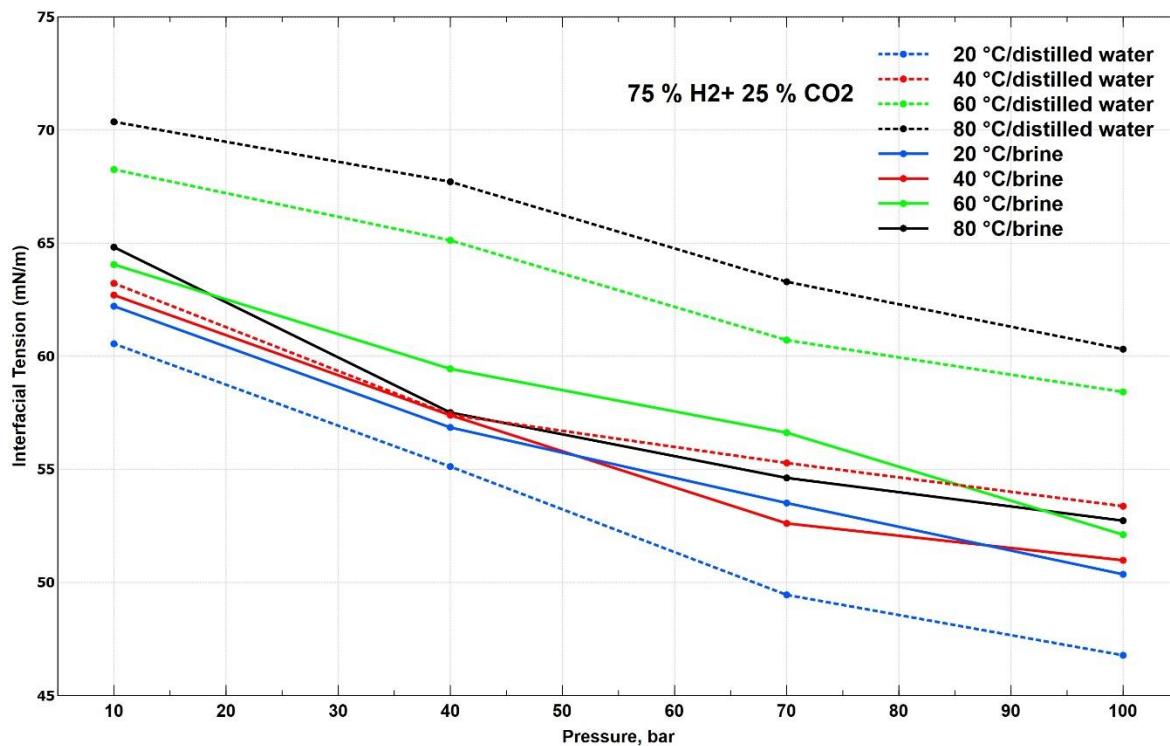


Figure 2: Interfacial tension (IFT) between 75% $\text{H}_2 + 25\% \text{CO}_2$ mixture and distilled water/brine as a function of pressure and temperature.

3.3. The impact of pressure, temperature, and salinity on IFT within 50 % H₂+50% CO₂/water systems

The interfacial tension (IFT) of a 50% H₂ + 50% CO₂ mixture with distilled water and formation brine is influenced by temperature, salinity, and pressure. As shown in **Figure 3**, the results indicate that temperature plays a key role in modifying IFT trends for these systems. In the H₂ + CO₂/distilled water system, IFT increases with temperature, rising from 56.21 mN/m at 20°C to 67.15 mN/m at 80°C at 10 bar, with similar trends observed at higher pressures. In contrast, in the H₂ + CO₂/formation brine system, IFT initially increases but then decreases with temperature, rising from 59.12 mN/m at 20°C to 66.87 mN/m at 80°C at 10 bar.

Pressure shows a relatively minor effect on IFT compared to temperature. At 80°C, the IFT of the H₂ + CO₂/distilled water system decreases from 67.15 mN/m at 10 bar to 51.71 mN/m at 100 bar, while for the H₂ + CO₂/formation brine system, it decreases from 66.87 mN/m at 10 bar to 55.65 mN/m at 100 bar. This modest pressure dependence is primarily due to the small change in the H₂ + CO₂ mixture's density with increasing pressure at constant temperature.

Salinity has a moderate effect in reducing IFT, as observed from the lower IFT values for H₂ + CO₂/formation brine compared to H₂ + CO₂/distilled water under the same conditions. For example, at 80°C and 10 bar, the IFT of H₂ + CO₂/distilled water is 67.15 mN/m, whereas it is 66.87 mN/m for H₂ + CO₂/formation brine. These findings suggest that temperature has the most profound impact on IFT, increasing it in distilled water but altering it in formation brine, while salinity plays an important role in reducing IFT, which could influence gas mobility in subsurface environments.

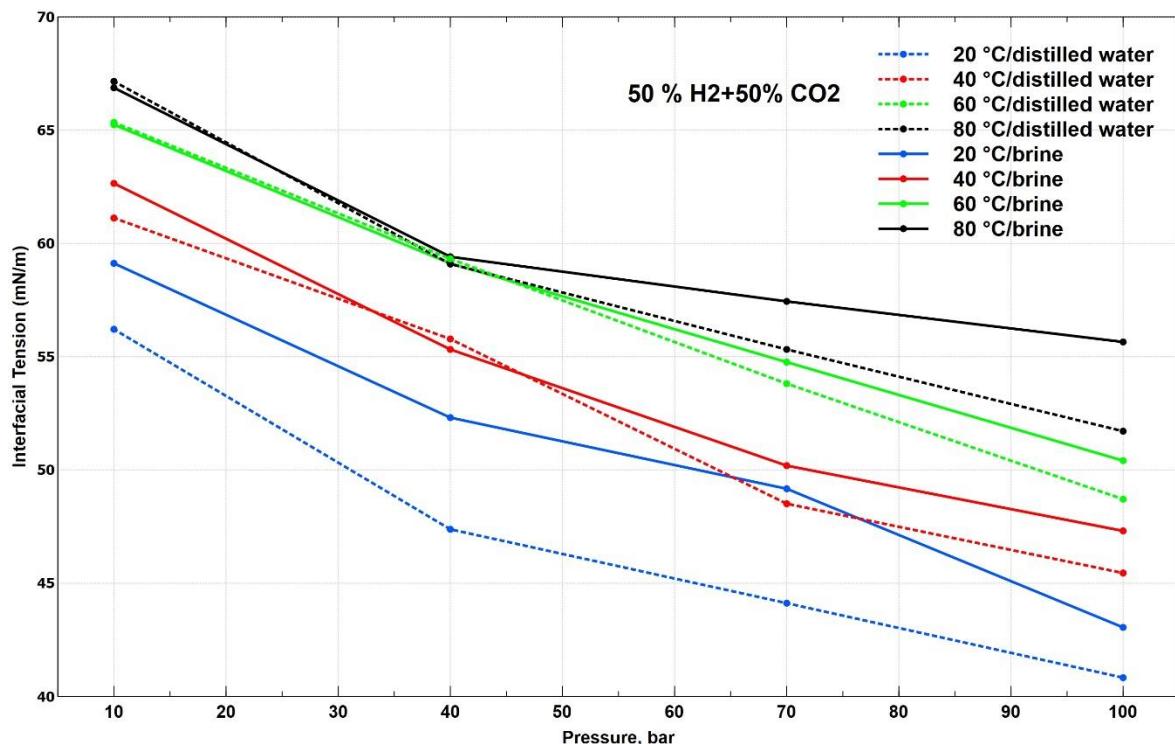


Figure 3: Interfacial tension (IFT) between 50% H₂ + 50% CO₂ mixture and distilled water/brine as a function of pressure and temperature.

3.4. The impact of pressure, temperature, and salinity on IFT within 25 % H₂+75% CO₂/water systems

The interfacial tension (IFT) of a 25% H₂ + 75% CO₂ mixture with distilled water and formation brine is significantly influenced by temperature, salinity, and pressure. As shown in **Figure 4**, both temperature and pressure have substantial effects on IFT, but pressure appears to have a more pronounced impact, particularly in the H₂ + CO₂/distilled water system.

In the H₂ + CO₂/distilled water system, IFT increases with temperature, rising from 53.1 mN/m at 20°C to 63.15 mN/m at 80°C at 10 bar. However, at higher pressures, the IFT decreases significantly. For instance, at 100 bar, IFT decreases from 63.15 mN/m at 80°C to 42.48 mN/m, indicating that pressure has a greater influence than temperature in this system. Similarly, in the H₂ + CO₂/formation brine system, IFT shows a similar increase with temperature, rising from 56.33 mN/m at 20°C to 65.7 mN/m at 80°C at 10 bar. Yet, pressure exerts a more substantial effect, as the IFT decreases from 65.7 mN/m at 10 bar to 45.65 mN/m at 100 bar (both at 80°C).

These results highlight the dominant role of pressure in reducing IFT in both systems, as the changes in IFT due to pressure are larger than those observed with temperature. The increase in pressure leads to a denser gas mixture, which affects the gas-liquid interface, thus lowering the IFT. On the other hand, temperature increases IFT in distilled water but influences it differently in brine.

Salinity also plays an important role in reducing IFT, as observed in the H₂ + CO₂/formation brine system, where the IFT values are consistently higher than in the distilled water system at the same temperature and pressure. For example, at 80°C and 10 bar, the IFT of H₂ + CO₂/formation brine is 65.7 mN/m, compared to 63.15 mN/m in distilled water.

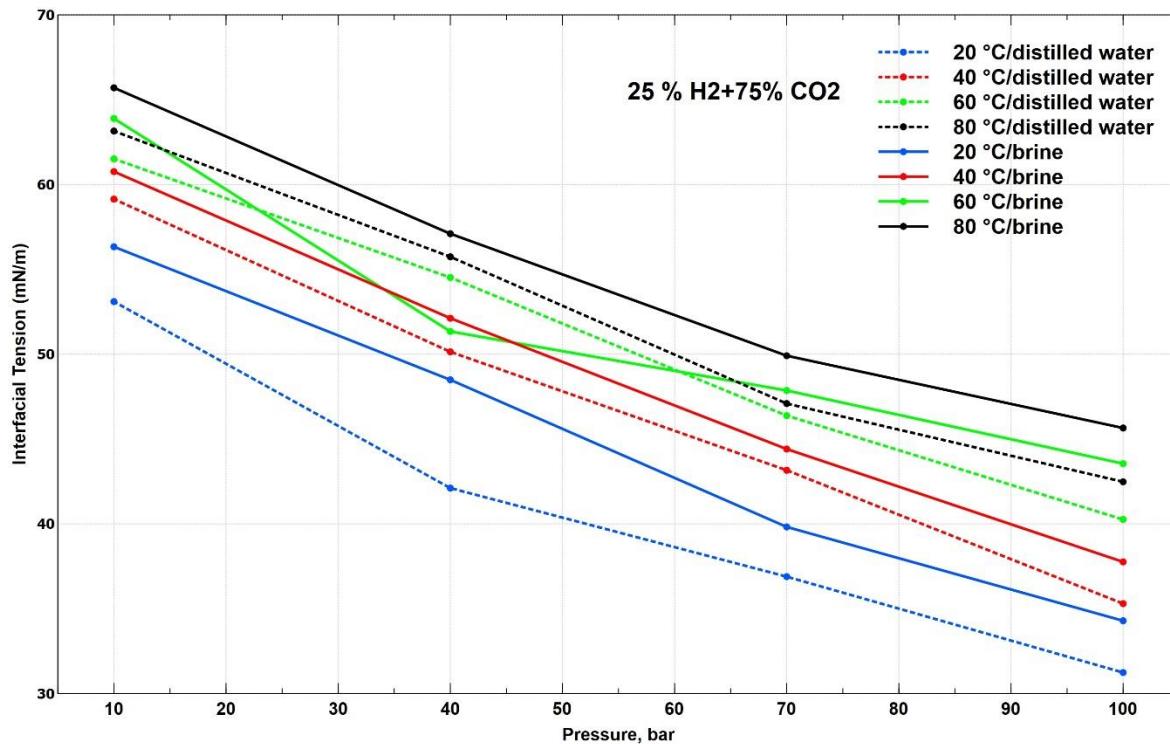


Figure 4: Interfacial tension (IFT) between 25% H₂ + 75% CO₂ mixture and distilled water/brine as a function of pressure and temperature.

3.5. The impact of pressure, temperature, and salinity on IFT within 100 % CO₂/water systems

The interfacial tension (IFT) of a 100% CO₂ mixture with distilled water and formation brine is significantly influenced by temperature, salinity, and pressure. As shown in **Figure 5**, both temperature and pressure affect IFT, with pressure having a more pronounced impact, particularly in the CO₂/distilled water system.

In the CO₂/distilled water system, IFT increases with temperature, rising from 51.41 mN/m at 20°C to 61.24 mN/m at 80°C at 10 bar. However, as pressure increases, IFT decreases substantially. For example, at 100 bar, IFT decreases from 61.24 mN/m at 80°C to 37.81 mN/m, showing that pressure has a greater influence than temperature in this system. Similarly, in the CO₂/formation brine system, IFT increases with temperature, rising from 54.49 mN/m at 20°C to 63.29 mN/m at 80°C at 10 bar. Yet, pressure exerts a more significant effect, with IFT decreasing from 63.29 mN/m at 10 bar to 40.78 mN/m at 100 bar.

These results underline the dominant role of pressure in reducing IFT in both systems. The decrease in IFT with increasing pressure can be attributed to the increase in the density of the CO₂ gas mixture, which modifies the gas-liquid interface. In contrast, temperature increases IFT in distilled water but has a different effect in the brine system, where the interaction with dissolved salts may influence the interfacial characteristics differently.

Salinity also plays a critical role in reducing IFT, as observed in the CO₂/formation brine system, where the IFT values are consistently higher than in the distilled water system at the

same temperature and pressure. For instance, at 80°C and 10 bar, the IFT in the CO₂/formation brine system is 63.29 mN/m, compared to 61.24 mN/m in distilled water.

In summary, pressure has the most substantial impact on IFT in both systems, with temperature and salinity also contributing to variations in IFT. This knowledge is essential for understanding gas behaviour and mobility in subsurface environments, particularly in high-pressure CO₂ storage scenarios.

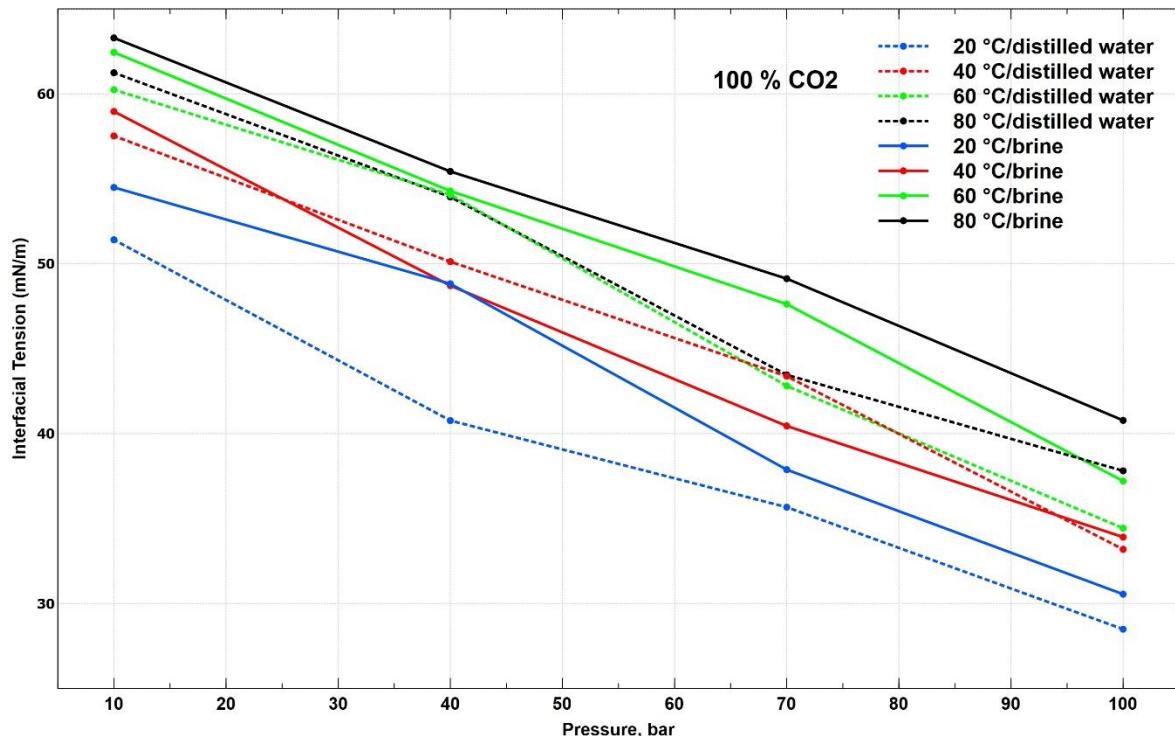


Figure 5: Interfacial tension (IFT) between 100% CO₂ mixture and distilled water/brine as a function of pressure and temperature.

4. Discussion

The interfacial tension (IFT) between gas and liquid phases plays a fundamental role in subsurface gas storage, influencing gas mobility, capillary trapping, and overall reservoir behaviour. This study demonstrates the intricate effects of pressure, temperature, and salinity on IFT for various H₂ and CO₂ gas mixtures under realistic subsurface conditions, aligning with established physicochemical principles governing gas-liquid interactions.

Temperature exhibited a dual effect on IFT, depending on the salinity of the aqueous phase. In pure H₂/distilled water systems, IFT increased with temperature, rising from 64.53 mN/m at 20°C to 73.34 mN/m at 80°C under 10 bar, consistent with previous findings that attribute this trend to enhanced molecular kinetic energy and reduced intermolecular cohesion in the liquid phase. However, in H₂/formation brine systems, the opposite trend was observed, with IFT decreasing from 67.11 mN/m at 20°C to 61.61 mN/m at 80°C, likely due to the solubility effects of dissolved salts that weaken intermolecular forces at higher temperatures. A similar trend was

evident in CO₂-rich systems, where IFT increased with temperature in distilled water but exhibited a less pronounced increase or even a decrease in formation brine.

Pressure effects on IFT were relatively minor for pure H₂ systems but more significant in CO₂-containing mixtures. For H₂/distilled water at 80°C, IFT decreased slightly from 73.34 mN/m at 10 bar to 69.12 mN/m at 100 bar, reinforcing the notion that H₂ compressibility effects are minimal due to its low molecular weight and weak intermolecular interactions. Conversely, in the 25% H₂ + 75% CO₂/distilled water system, IFT dropped substantially from 63.15 mN/m at 10 bar to 42.48 mN/m at 100 bar, driven by CO₂'s higher solubility at elevated pressures, which enhances gas dissolution and promotes stronger molecular interactions with the liquid phase.

Salinity exerted a pronounced influence on IFT across all gas mixtures, reducing interfacial tension in both H₂ and CO₂-rich systems. In the 100% H₂ system at 80°C and 10 bar, IFT was 73.34 mN/m in distilled water but decreased to 61.61 mN/m in formation brine, consistent with the "salting-out effect," where dissolved salts elevate the ionic strength of the solution, decrease gas solubility, and consequently lower IFT. This trend persisted in CO₂-containing mixtures, with formation brine consistently yielding lower IFT values compared to distilled water under similar conditions.

These findings provide valuable insights into the interfacial behaviour of H₂ and CO₂ mixtures in subsurface environments, reinforcing the complex interplay of temperature, pressure, and salinity in determining IFT. Understanding these dynamics is crucial for optimizing gas storage strategies, enhancing reservoir performance, and mitigating potential risks associated with subsurface hydrogen and CO₂ injection.

5. Conclusion

This study provides a comprehensive evaluation of interfacial tension (IFT) variations in H₂-CO₂-brine systems under reservoir conditions, offering valuable insights into the physicochemical interactions that govern subsurface hydrogen storage. The results confirm that temperature, pressure, and salinity significantly influence IFT, with distinct trends observed depending on the gas composition and aqueous phase properties. Temperature effects varied with salinity, leading to either an increase or decrease in IFT, while pressure had a more pronounced impact in CO₂-containing mixtures due to enhanced gas solubility. Salinity consistently reduced IFT, reinforcing the "salting-out effect" that alters gas-water interactions.

Furthermore, the study highlights the critical role of CO₂ as a cushion gas in underground hydrogen storage. Increasing the proportion of CO₂ led to a decline in IFT, improving hydrogen mobility and potentially enhancing storage efficiency. The observed nonlinear pressure dependence at higher CO₂ concentrations underscores the complexity of multiphase interactions in subsurface environments. These findings provide essential experimental data for modelling and simulating hydrogen storage in geological formations, contributing to the optimization of cushion gas strategies for maintaining reservoir pressure and maximizing hydrogen recovery.

Acknowledgements

The authors acknowledge the support provided by The University of Adelaide, Edith Cowan University and, Kyushu University, and University of Edinburgh for supervision and resources.

6. References:

1. Abdulelah, H., Al-Yaseri, A., Ali, M., Giwelli, A., Negash, B.M., Sarmadivaleh, M.: CO₂/Basalt's interfacial tension and wettability directly from gas density: Implications for Carbon Geo-sequestration. *J Pet Sci Eng.* 204, 108683 (2021). <https://doi.org/10.1016/j.petrol.2021.108683>
2. Ali, M., Yekeen, N., Pal, N., Keshavarz, A., Iglauer, S., Hoteit, H.: Influence of pressure, temperature and organic surface concentration on hydrogen wettability of caprock; implications for hydrogen geo-storage. *Energy Reports.* 7, 5988–5996 (2021). <https://doi.org/10.1016/j.egyr.2021.09.016>
3. Al-Yaseri, A., Abdulelah, H., Yekeen, N., Ali, M., Negash, B.M., Zhang, Y.: Assessment of CO₂/shale interfacial tension. *Colloids Surf A Physicochem Eng Asp.* 627, 127118 (2021)
4. Esfandyari, H., Hosseini, M., Ali, M., Iglauer, S., Haghghi, M., Keshavarz, A.: Assessment of the interfacial properties of various mineral/hydrogen/water systems. *J Energy Storage.* 60, 106637 (2023)
5. Safari, A., Zeng, L., Nguele, R., Sugai, Y., Sarmadivaleh, M.: Review on using the depleted gas reservoirs for the underground H₂ storage: A case study in Niigata prefecture, Japan. *Int J Hydrogen Energy.* 48, 10579–10602 (2023). <https://doi.org/10.1016/j.ijhydene.2022.12.108>
6. Mirchi, V., Dejam, M., Alvarado, V.: Interfacial tension and contact angle measurements for hydrogen-methane mixtures/brine/oil-wet rocks at reservoir conditions. *Int J Hydrogen Energy.* 47, 34963–34975 (2022). <https://doi.org/10.1016/j.ijhydene.2022.08.056>
7. Safari, A., Sugai, Y., Sarmadivaleh, M., Imai, M.: Screening and ranking Japanese gas fields for underground H₂ storage potential: Impact of the reservoir drive mechanism. *J Energy Storage.* 70, 107679 (2023). <https://doi.org/10.1016/J.JEST.2023.107679>
8. Hosseini, M., Fahimpour, J., Ali, M., Keshavarz, A., Iglauer, S.: H₂–brine interfacial tension as a function of salinity, temperature, and pressure; implications for hydrogen geo-storage. *J Pet Sci Eng.* 213, 110441 (2022). <https://doi.org/10.1016/J.PETROL.2022.110441>
9. Pan, B., Yin, X., Iglauer, S.: Rock-fluid interfacial tension at subsurface conditions: Implications for H₂, CO₂ and natural gas geo-storage. *Int J Hydrogen Energy.* 46, 25578–25585 (2021)

10. Hosseini, M., Fahimpour, J., Ali, M., Keshavarz, A., Iglauer, S.: H₂–brine interfacial tension as a function of salinity, temperature, and pressure; implications for hydrogen geo-storage. *J Pet Sci Eng.* 213, 110441 (2022)
11. Al-Mukainah, H., Al-Yaseri, A., Yekeen, N., Al Hamad, J., Mahmoud, M.: Wettability of shale–brine–H₂ system and H₂–brine interfacial tension for assessment of the sealing capacities of shale formations during underground hydrogen storage. *Energy Reports.* 8, 8830–8843 (2022)
12. Ali, M., Pan, B., Yekeen, N., Al-Anssari, S., Al-Anazi, A., Keshavarz, A., Iglauer, S., Hoteit, H.: Assessment of wettability and rock–fluid interfacial tension of caprock: Implications for hydrogen and carbon dioxide geo-storage. *Int J Hydrogen Energy.* 47, 14104–14120 (2022)
13. Esfandyari, H., Sarmadivaleh, M., Esmaeilzadeh, F., Ali, M., Iglauer, S., Keshavarz, A.: Corrigendum to “Experimental evaluation of rock mineralogy on hydrogen-wettability: Implications for hydrogen geo-storage” [J. Energy Storage, 52 (2022) 104866]. *J Energy Storage.* 57, 106162 (2023). <https://doi.org/10.1016/j.est.2022.106162>
14. Esfandiari, H., Shadizadeh, S.R., Abdollahi, R.: Evaluation the Impact of Mineralogical Composition of Reservoir Rocks on Wettability during Surfactant Flooding Processes. In: 82nd EAGE Annual Conference & Exhibition. pp. 1–5. European Association of Geoscientists & Engineers (2021)
15. Esfandyari, H., Safari, A., Hashemi, A., Hassanpouryouzband, A., Haghghi, M., Keshavarz, A., Zeinijahromi, A.: Surface interaction changes in minerals for underground hydrogen storage: Effects of CO₂ cushion gas. *Renew Energy.* 237, 121726 (2024). <https://doi.org/10.1016/j.renene.2024.121726>
16. Esfandiari, H., Safari, A., Payten, T., Hassanpouryouzband, A., Haghghi, M., Zeinijahromi, A., Keshavarz, A.: Evaluation of Free Surface Energy of H₂+CO₂/ Basalt /Brine System in Underground Hydrogen Storage. In: 85th EAGE Annual Conference & Exhibition (including the Workshop Programme). pp. 1–5. European Association of Geoscientists & Engineers (2024)
17. Pan, B., Liu, K., Ren, B., Zhang, M., Ju, Y., Gu, J., Zhang, X., Clarkson, C.R., Edlmann, K., Zhu, W.: Impacts of relative permeability hysteresis, wettability, and injection/withdrawal schemes on underground hydrogen storage in saline aquifers. *Fuel.* 333, 126516 (2023)
18. Esfandyari, H., Sarmadivaleh, M., Esmaeilzadeh, F., Ali, M., Iglauer, S., Keshavarz, A.: Experimental evaluation of rock mineralogy on hydrogen-wettability: Implications for hydrogen geo-storage. *J Energy Storage.* 52, 104866 (2022). <https://doi.org/10.1016/J.EST.2022.104866>
19. Safari, A., Esfandyari, H., Sugai, Y., Haghghi, M., Zeinijahromi, A., Sarmadivaleh, M., Masoumi, H.: Computational fluid dynamics modeling of rock–liquid–H₂ contact angles: Implications for underground hydrogen storage. *J Energy Storage.* 81, 110475 (2024). <https://doi.org/10.1016/J.EST.2024.110475>

20. Abdollahi, R., Motahhari, S.M., Esfandyari, H.: Integrated Technical and Economical Methodology for Assessment of Undeveloped Shale Gas Prospects: Applying in the Lurestan Shale Gas, Iran. *Math Probl Eng.* 2021, 1–8 (2021). <https://doi.org/10.1155/2021/7919264>

21. Safari, A., Sugai, Y., Sarmadivaleh, M., Imai, M., Esfandyari, H., Haghghi, M., Moradi, M., Zeinijahromi, A.: Analysis of the Japanese Depleted Gas Fields' Prospect for Underground Hydrogen Storage. In: Day 4 Thu, October 05, 2023. SPE (2023)

22. Safari-Beidokhti, M., Hashemi, A., Abdollahi, R., Hematpur, H., Esfandyari, H.: Numerical Well Test Analysis of Condensate Dropout Effects in Dual-Permeability Model of Naturally Fractured Gas Condensate Reservoirs: Case Studies in the South of Iran. *Math Probl Eng.* 2021, 1–10 (2021). <https://doi.org/10.1155/2021/9916914>

23. Al-Yaseri, A., Jha, N.K.: On hydrogen wettability of basaltic rock. *J Pet Sci Eng.* 200, 108387 (2021). <https://doi.org/10.1016/j.petrol.2021.108387>

24. Armstrong, R.T., Sun, C., Mostaghimi, P., Berg, S., Rücker, M., Luckham, P., Georgiadis, A., McClure, J.E.: Multiscale characterization of wettability in porous media. *Transp Porous Media.* 140, 215–240 (2021)

25. Najafi, A., Siavashi, J., Ebadi, M., Orlov, D., Sharifi, M., Fahimpour, J., Keshavarz Moraveji, M., Koroteev, D.: Using computational fluid dynamics to compute the pore-scale CO₂-brine relative permeability. *Fuel.* 341, 127715 (2023). <https://doi.org/10.1016/J.FUEL.2023.127715>

26. Amez, I., Gonzalez, S., Sanchez-Martin, L., Ortega, M.F., Llamas, B.: Underground methanation, a natural way to transform carbon dioxide into methane. In: *Climate Change Science.* pp. 81–106. Elsevier (2021)

27. Rönsch, S., Schneider, J., Matthischke, S., Schlüter, M., Götz, M., Lefebvre, J., Prabhakaran, P., Bajohr, S.: Review on methanation—From fundamentals to current projects. *Fuel.* 166, 276–296 (2016)

28. Monod, J.: THE GROWTH OF BACTERIAL CULTURES. *Annu Rev Microbiol.* 3, 371–394 (1949). <https://doi.org/10.1146/annurev.mi.03.100149.002103>

29. Safari, A., Sugai, Y., Salgar-Chaparro, S.J., Roshan, H., Sarmadivaleh, M.: Hydrogen-consuming bacteria in underground hydrogen storage: Bacterial diversity and mathematical modeling of their impacts on storage efficiency. *J Energy Storage.* 113, 115519 (2025). <https://doi.org/10.1016/j.est.2025.115519>

30. Sedev, R., Akhondzadeh, H., Ali, M., Keshavarz, A., Iglauer, S.: Contact angles of a brine on a bituminous coal in compressed hydrogen. *Geophys Res Lett.* 49, e2022GL098261 (2022)

31. Chabab, S., Kerkache, H., Bouchkira, I., Poulain, M., Baudouin, O., Moine, É., Ducousoo, M., Hoang, H., Galliéro, G., Cézac, P.: Solubility of H₂ in water and NaCl brine under subsurface storage conditions: Measurements and thermodynamic modeling. *Int J Hydrogen Energy.* 50, 648–658 (2024). <https://doi.org/10.1016/j.ijhydene.2023.10.290>

32. Dalal Isfehani, Z., Sheidaie, A., Hosseini, M., Fahimpour, J., Iglauer, S., Keshavarz, A.: Interfacial tensions of (brine + H₂ + CO₂) systems at gas geo-storage conditions. *J Mol Liq.* 374, 121279 (2023). <https://doi.org/10.1016/j.molliq.2023.121279>
33. Ali, M., Yekeen, N., Pal, N., Keshavarz, A., Iglauer, S., Hoteit, H.: Influence of organic molecules on wetting characteristics of mica/H₂/brine systems: Implications for hydrogen structural trapping capacities. *J Colloid Interface Sci.* 608, 1739–1749 (2022). <https://doi.org/10.1016/j.jcis.2021.10.080>
34. Yekeen, N., Padmanabhan, E., Abdulelah, H., Irfan, S.A., Okunade, O.A., Khan, J.A., Negash, B.M.: CO₂/brine interfacial tension and rock wettability at reservoir conditions: A critical review of previous studies and case study of black shale from Malaysian formation. *J Pet Sci Eng.* 196, 107673 (2021). <https://doi.org/10.1016/j.petrol.2020.107673>
35. Yekta, A.E., Manceau, J.-C., Gaboreau, S., Pichavant, M., Audigane, P.: Determination of Hydrogen–Water Relative Permeability and Capillary Pressure in Sandstone: Application to Underground Hydrogen Injection in Sedimentary Formations. *Transp Porous Media.* 122, 333–356 (2018). <https://doi.org/10.1007/s11242-018-1004-7>
36. Ali, M., Pan, B., Yekeen, N., Al-Anssari, S., Al-Anazi, A., Keshavarz, A., Iglauer, S., Hoteit, H.: Assessment of wettability and rock-fluid interfacial tension of caprock: Implications for hydrogen and carbon dioxide geo-storage. *Int J Hydrogen Energy.* 47, 14104–14120 (2022). <https://doi.org/10.1016/J.IJHYDENE.2022.02.149>
37. Iglauer, S.: Optimum geological storage depths for structural H₂ geo-storage. *J Pet Sci Eng.* 212, 109498 (2022)
38. Liu, H., He, Q., Borgia, A., Pan, L., Oldenburg, C.M.: Thermodynamic analysis of a compressed carbon dioxide energy storage system using two saline aquifers at different depths as storage reservoirs. *Energy Convers Manag.* 127, 149–159 (2016). <https://doi.org/10.1016/J.ENCONMAN.2016.08.096>