

FIELD-SCALE APPARENT ELECTRICAL CONDUCTIVITY MAPPING OF SOIL PROPERTIES IN PRECISION AGRICULTURE

Abayomi Adesola Olajojo^{1*} and Michael Adeyinka Oladunjoye²

¹Ajayi Crowther University, Department of Earth Sciences, Oyo, Nigeria – E-mail: yomiolajo@gmail.com

²University of Ibadan, Department of Geology, Ibadan, Nigeria – E-mail: ma.oladunjoye@yahoo.com

*Corresponding author

ABSTRACT

The physical examination of a functioning cacao farm revealed varying pod production rates in its area. Agricultural soil nutrients assessment is usually through soil geochemical/chemical analyses which are laborious and expensive, necessitating faster/cheaper alternatives. This investigation assessed the physical properties that can substitute for geochemical analysis of soil nutrient. The study was executed at 0.3 m depth. The Volumetric Water Content-VWC and Apparent Electrical Conductivity- EC_a of the soils were determined using VG-meter-200 moisture-meter and resistivity earth-meter. 912 EC_a /VWC points were measured. Soil textural classes (51-sample) were established using Bouyoucos method. Falling head permeability test was conducted on nine cored soil samples for water infiltration assessment. The soils EC_a (10-344 $\mu\text{S}/\text{cm}$) and VWC distributions (2-69%) showed similar variation, increase in VWC corresponds to rise in EC_a value; soil moisture aids the mobility of ions in solution and a rise in EC_a connotes presence of more dissolved ions. The soils were classified as sandy loam, loamy sand and sandy clayey loam. Soils' permeability ranged from 4.11×10^{-5} - 3.97×10^{-3} cm/sec; infiltration rate varied inversely with the EC_a accounting for the moisture variation. Low permeable soil has high nutrient retention and water-holding capacities. Soil physical properties were effective in evaluating the nutrient inconsistency.

Keywords: Electrical conductivity, volumetric water content, soil texture, soil permeability, soil nutrient.

INTRODUCTION

Agricultural production causes changes in soil which vary in space and time; this requires a continuous and precise spatial evaluation of physical and chemical properties of the soil. Usual farming practices often treat an agricultural farmland evenly, disregarding the innate variability of soil

and crop conditions between and within fields; uniform management is not the most effective management plan (Corwin and Lesch, 2005a and Moral *et al.*, 2010).

The cost of geochemical assessment is enormous, a comprehensive soil assessment may be difficult to achieve due to the necessity of many soil samples which invariably limits denser sampling and results in the production of less accurate assessment maps due to cost of analysis (Moral *et al.*, 2010 and Costa *et al.*, 2014). Indirect approach via apparent electrical conductivity (EC_a) serves as an alternative for dense sampling and provides an avenue to lower the cost, coupled with good correlation with soil variables (Costa *et al.*, 2014).

Apparent electrical conductivity of soil has broad relevance in the field of soil science and agronomy (Ekwue and Bartholomew, 2011; Corwin and Lesch, 2013; Molin and Faulin, 2013 and Siqueira *et al.*, 2014). Soil electrical conductivity (EC) in agriculture field assessment has transformed from soil salinity tool to mapping the spatial variability of soil physico-chemical properties in analyzing soil quality, transport model and site specific management (Corwin and Lesch, 2005b). Electrical conductivity of soil depends on soil mineralogy, particle size distribution, porosity, salinity level, cation exchange capacity (CEC), distribution of pore size, connectivity of the pore, water content and temperature (Corwin and Lesch, 2005a; Khattak and Hussain, 2007; Bai *et al.*, 2013; Brillante *et al.*, 2015 and Hawkins *et al.*, 2017).

Soil texture is a vital tool influencing the relationship between soil and water, gas exchange, CEC, organic matter content and plant nutrient required for its growth (Khattak and Hussain, 2007 and Ritchey *et al.*, 2015). Soil is a permeable unit that is characterized with interconnection of voids/spaces allowing flow of fluids as a result of difference in energy heads. Soil permeability can be measured in the laboratory using constant head, falling head and it can also be deduced from grain size analysis as well as in the field (Elhakim 2016). The rate at which water infiltrates soil unit is estimated as its capacity to absorb water during a given period (Scherer *et al.*, 2013). Flow of fluid and passage of electrical current are controlled by the distribution and the volume of the void in soil matrix (Kirkby *et al.*, 2016).

Currently, there is limited documentation on using physical parameters to assess agricultural soil productivity and its long-term performance in Nigeria. On the basis of this aim, the research was focused on assessing the effectuality of electrical resistivity technique in mapping the variability of soil properties; also to establish the influence of soil particle sizes and soil permeability on productivity across the cacao farm.

The study was carried out on soil within cacao farm that lies between Latitudes $7^{\circ}13'15.9''N$ and $7^{\circ}13'19.6''N$, and Longitudes $3^{\circ}51'40.1''E$ and $3^{\circ}51'43''E$ at Cocoa Research Institute of Nigeria (CRIN), Ibadan (Figure 1). The farm covers an area extent of 7,722 m². Site inspection of the farm showed that the cacao trees were characterised with different pods' production rate. The research institute is situated on schist and migmatite gneiss complex (Figure 2).

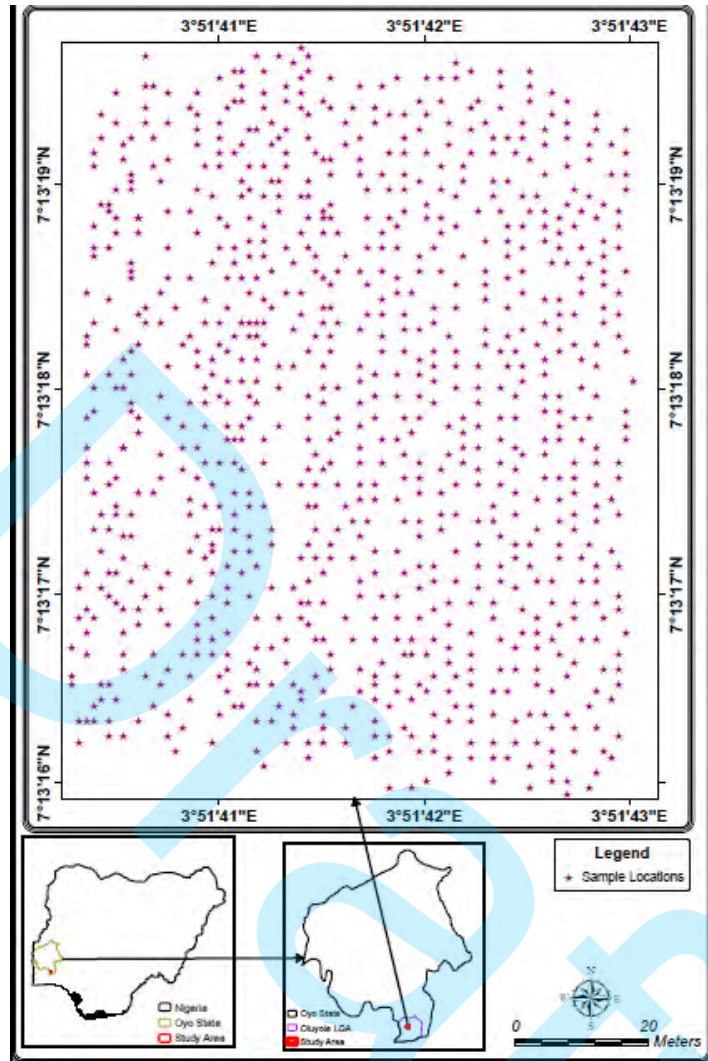


Figure 1: Spatial distribution of data acquisition points in the study location.

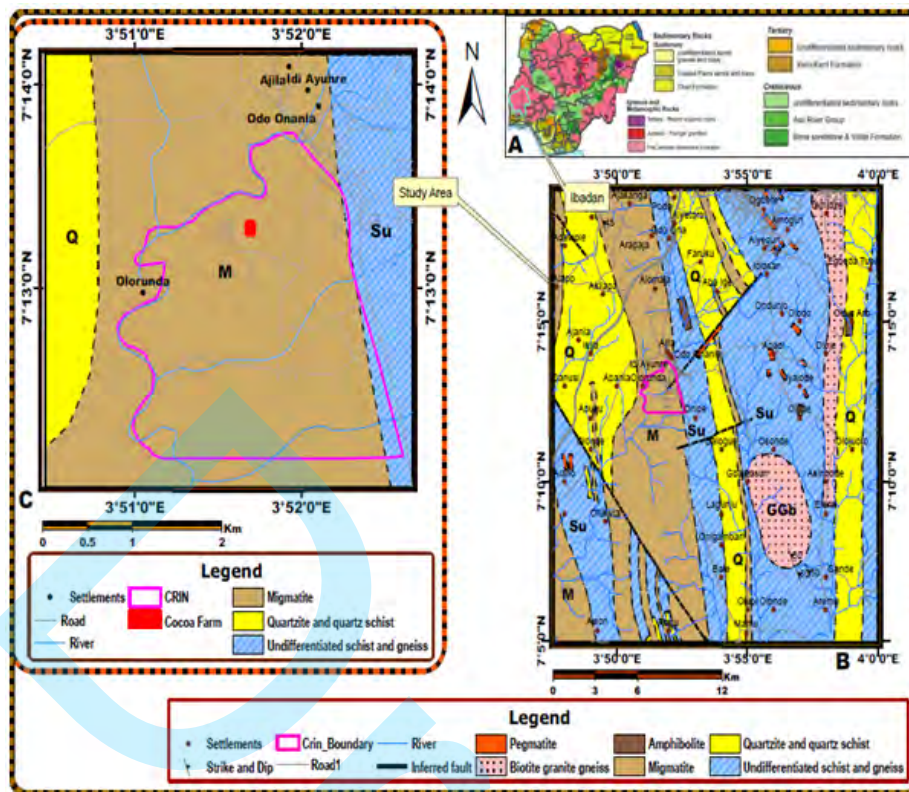


Figure 2: Geological map of the study location (Adapted from NGSa 2009).

2.0 Methodology

Visual observation of the cacao trees conducted during the peak of dry season showed that some of the trees withered while others exhibited healthy growth. Mommer (1999) stated that 90% of cacao's root hairs are situated within the 30 cm of soil while remaining 10 % is found at deeper depth (Figure 3). This depth distribution indicates the need to evaluate the root zone in which the majority of the root hairs were situated in order to attend to the impending yield limiting causes. The investigation was conducted at 30 cm below the ground surface for all the techniques engaged. Seasonal appraisal of spatial inconsistency of soils' properties in cacao was carried out in August 2016 and March 2017 to check variations during the peak of wet and dry seasons. The following techniques were adopted for the evaluation; electrical resistivity, volumetric water content, and permeability. Electrical resistivity, volumetric water content and thermal assessment were seasonally evaluated. Garmin global positioning system-GPS was used to harmonize the measurement points and all the maps were generated using ARCGIS 10.2 software.

2.1 Electrical Resistivity

Soil apparent electrical conductivity (EC_a) was evaluated using Allied Ohmega earth resistivity meter, and Wenner disposition was engaged for the resistivity measurement (Bozkurt *et al.*, 2009) at an even inter-electrode spacing of 0.4 m. The choice of Wenner array was based on its simplicity, ease

of movement of electrodes, and it is the standard used for electrical soil testing as specified in ASTM G57 surveys (AGI, 2017). The electrodes were permanently fixed on a handy wooden frame to ensure constant spacing, equal depth of penetration and ease of data acquisition (Figs. 4 and 5). Measurements were made at every 3 m along a profile and interline spacing of 3 m was adopted. Twenty-seven lines of measurement were established, containing 912 and 906 data points taken in the wet and dry seasons respectively.

The resistivity (ρ) measured in a homogeneous and isotropic layer is given by

$$\rho = K \frac{V}{I} \dots\dots\dots (1)$$

K = Geometric factor for Wenner array

V = Potential difference

I = Applied current

$$K = \frac{2\pi}{\left(\frac{2}{a} - \frac{1}{a'}\right)} = 2\pi a \dots\dots\dots (2)$$

Note that $\rho = RK$ and $V = IR$ (Ohm's law)... (3)

R = Resistance

a = Inter-electrode spacing

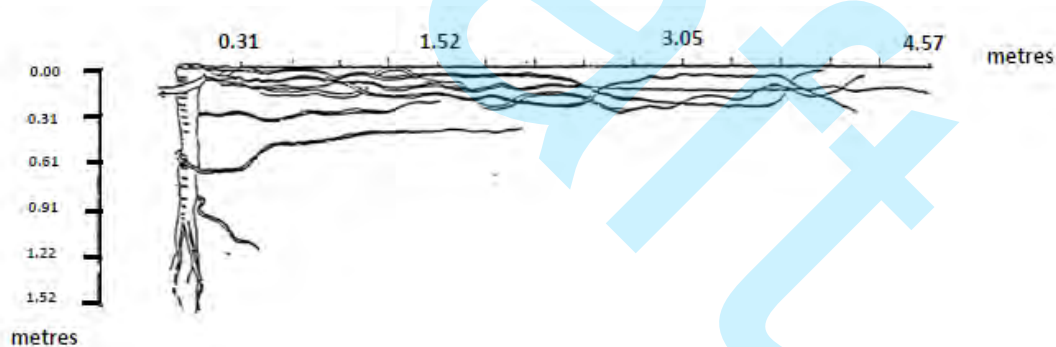


Figure 3: The root system of cacao plant (Modified after Mommer, 1999).

$$\rho = 2\pi a \frac{V}{I} = 2\pi a R \dots\dots\dots (4)$$

The resistivity measurements were taken at 30 cm within the root zone. Edwards (1977) proposed the effective depth of penetration (Z_e) of electric current using Wenner array to be;

$$Z_e = 0.519 * a \dots\dots\dots (5)$$

a = 40 cm

$$Z_e = 40 * 0.519 = 20.76 \text{ cm} \dots\dots\dots (6)$$

Ejection of electric current from the electrode to the ground takes place at the point source, considering additional length of 10 cm from the electrode that has extended into the substrate, thus, the depth of measurement is 30.76 cm. Soil apparent electrical resistivity was taken at the mentioned depth (30.76 cm) for all the sample points



Figure 4: Electrical earth resistance measurement taken with Allied Ohmega resistivity meter at CRIN during wet season.

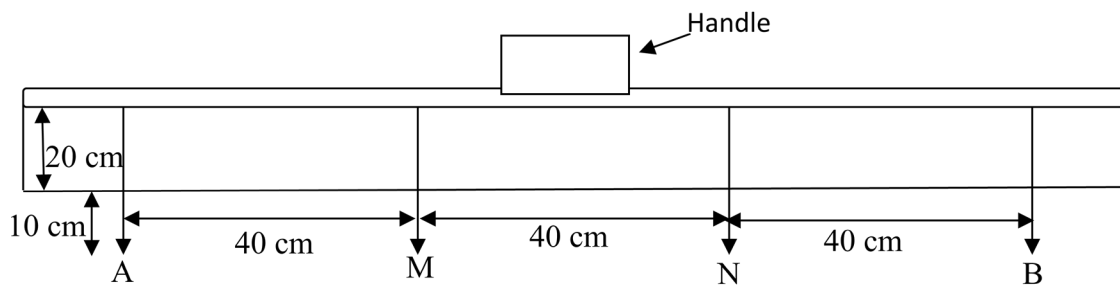


Figure 5: Schematic arrangement of electrodes mounted on a fixed wooden frame

2.2 Volumetric Water Content (VWC)

The volumetric water content of soil was quantified via VG-Meter-200 soil moisture meter; it has the capacity of measuring the dielectric constant to infer soil solution. It is a modification of VH400 which has been reported to have provided accurate results (Smarsly, 2013). Shallow pits of 30 cm were dug in order to assess the soil water at same site where the resistivity measurements were taken. Volumetric water content (Θ_v) is the volume of water per unit volume of soil. Volume is the ratio of mass to density (ρ) given by Bilskie (2001) as;

$$\Theta_v = \frac{\text{Volume of water}}{\text{Volume of soil}} = \frac{\frac{\text{Mass of water}}{\text{Density of water}}}{\frac{\text{Mass of soil}}{\text{Density of soil}}} \dots\dots\dots (7)$$

$$\Theta_v = \frac{\text{Mass of water}}{\text{Mass of soil}} * \frac{\text{Density of soil}}{\text{Density of water}} = \Theta_g * \frac{\text{Density of soil}}{\text{Density of water}} \dots\dots\dots (8)$$

$$\Theta_v = \Theta_g * \text{Specific Gravity} \dots\dots\dots (9)$$

Where, Θ_g is the gravimetric water content

2.3 Determination of Soil Particle Sizes

A total of fifty-one soil samples were collected with the aid of hand auger from cacao plot. They were placed in polythene bags and labeled to avoid mix-up of samples. Samples were taken at every 18 m along a profile and inter-line spacing of 9 m was adopted; Garmin global position system (GPS) was used in taking the coordinates of the sample locations. The soil samples were air dried at room temperature, soil particles larger than 2mm in diameter were eliminated via 2 mm sieve aperture using mechanical sieve device set to agitate the sample for fifteen minutes.. 50 g of soil particles that passed through the 2 mm sieve aperture was taken for particle size analysis to determine the proportion of clay, silt and sand using Bouyoucos hydrometer method at the Department of Agronomy, University of Ibadan, Nigeria.

Stokes' law is the basis for hydrometer analysis; it relates velocity of fall & diameter of particles sphere in a fluid together with density of the sphere and that of the fluid, and the fluid viscosity. The equation (Braja 2010) is given as;

$$V = \frac{2 * (\rho_s - \rho_f) * g}{9 \eta} * \left(\frac{D}{2}\right)^2 \dots\dots\dots (10)$$

Where,

- v = velocity of fall of particle sphere in cm/s
- ρ_s = Density of sphere
- ρ_f = Density of fluid which varies with temperature
- η = viscosity of the fluid (g/(cm*s))
- D = the diameter of particle sphere in cm

Substituting ρ_f for ρ_w which is the density of water, D can be determined from the equation as,

$$D = \sqrt{\frac{18\eta V}{(\rho_s - \rho_w)}} \dots\dots\dots (11)$$

Where, $v = \frac{L}{T}$

L = effective length in cm, T = time taken in s

Therefore, $D = \sqrt{\frac{18\eta L}{(\rho_s - \rho_w)T}} \dots\dots\dots (12)$

2.4 Permeability Test-Falling Head Technique

Ten undisturbed soil samples were extracted from the regions of low, medium and high conductivity/VWC using core barrels at 0.3 m below the ground surface. This was done to establish the water infiltration rate in these earth materials and the test was carried out at the Department of Petroleum Engineering, University of Ibadan, Nigeria. The approach involves measuring the drop in water level in a standpipe. The time taken by water to fall from the starting head “ H_1 ” to final head “ H_2 ” is “ t ”, let “ H ” represents the head at any intermediate time, and “ Q ” is the volume of water. Let “ $-dH$ ” be the change in head in time interval “ dt ” with cross-sectional area (a) in the stand pipe, Darcy’s law can be used to establish the rate of flow of water and is given by Braja (2010) as;

$$Q = \frac{-dH.a}{dt} = KA \frac{\Delta H}{L} \dots\dots\dots (13)$$

Hydraulic conductivity, $k = \left(2.303 \left(\frac{a.L}{A.\Delta t}\right) \log_{10} \frac{H_1}{H_2}\right) \text{ cm s}^{-1} \dots\dots\dots (14)$

Parameters to be calculated;

Length of the sample = L (cm)

Diameter of the sample = D (cm)

Diameter of the standpipe = d (cm)

Area of the standpipe = a (cm²) = $\pi d^2 / 4$

Cross-sectional area of the sample = A (cm²) = $\pi D^2 / 4$

Initial Hydraulic Head = H_1 (cm)

Final Hydraulic Head = H_2 (cm)

Time taken for water flow from H_1 to H_2 (change in head) = Δt (second)

3.0 Results and Discussion

3.1 Electrical Conductivity of Soils

Table 1 showed the breakdown of statistical parameters generated from the field data. The variation model generated by Warrick and Nielsen (1980) was used to ascertain the degree of variability (Table 2).

EC_a data of Cacao field showed moderate variability (60.97 %) in rainy period whereas the variability was slightly higher (64.11 %) in the dry period. Molin and Faulin (2013) considered the Coefficient of Variation (CV) as the first indicator in determining spatial variability of the measured parameter. Since the EC_a variability ranged between moderate and high class, and showed there is variation in the measured parameter. Therefore, it would serve as soil quality evaluator from which subsequent investigation sites could be established.

The salinity level in the cacao field during wet and dry seasons falls within the non-saline class (Table 3), suggesting that concentration of soluble ions in the field is not extremely high and the crops have the ability to absorb water and soil nutrient. Mean EC_a values recorded in the dry season is lesser than that of wet season which is consistent with the work of Doerge (1999).

Marshall (1987) noted that water has an inherent property in which electrical conductivity of water in the absence of dissolved ions is 0.055 $\mu\text{S}/\text{cm}$. Lide (2007) also reported that rise in the concentration of electrolytes leads to an increase electrical conductivity. This suggests that the measured electrical conductivity values in the farm were above the threshold of absence of soluble ions, thus indicating presence of dissolved ions in soil. The spatial distribution of apparent electrical conductivity (EC_a) during the wet and dry seasons was used in segmenting the spatial occurrence into high, moderate, and low EC_a (Figures 6 and 7).

There is reduction in the extent of the section covered by the moderate and high EC_a during the dry season compared to wet period due to decrease in soil moisture content (Figures 6 and 7).

Table 1: Exploratory statistics for soil apparent electrical conductivity (EC_a) of cacao field

Variable	Number of investigated points	Minimum	Maximum	Mean	Standard Deviation	Coefficient of Variation (%)
Wet Season						
Cacao Field EC _a ($\mu\text{S}/\text{cm}$)	912	13	344	68.04	41.48	60.97
Dry Season						
EC _a ($\mu\text{S}/\text{cm}$)	906	10	267	45.11	28.92	64.11

Table 2: Coefficient of variation, its range and classification (After Warrick and Nielsen 1980)

S/N	Coefficient of Variation (CV)	Class
1	CV < 12 %	Low
2	12 < CV < 62 %	Moderate
3	CV > 62 %	High

Table 3: Ranges of EC value and their corresponding salinity classes (After USDA 2011)

S/N	EC ($\mu\text{S}/\text{cm}$)	Class
1	0-2000	Non-saline
2	2000 – 4000	Very slightly saline
3	4000 – 8000	Slightly saline
4	8000 – 16000	Moderately saline
5	≥ 16000	Strongly saline

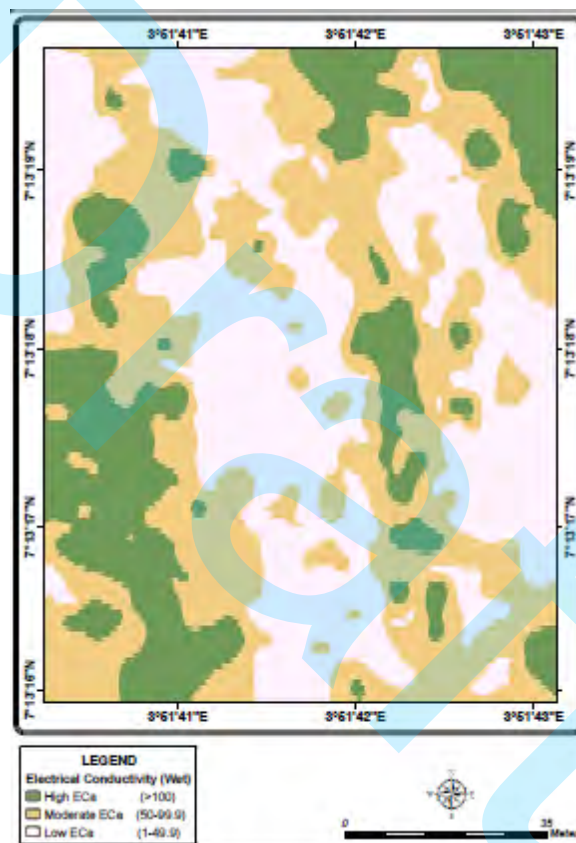


Figure 6: The spatial variation of the apparent electrical conductivity in cacao farm during wet season.

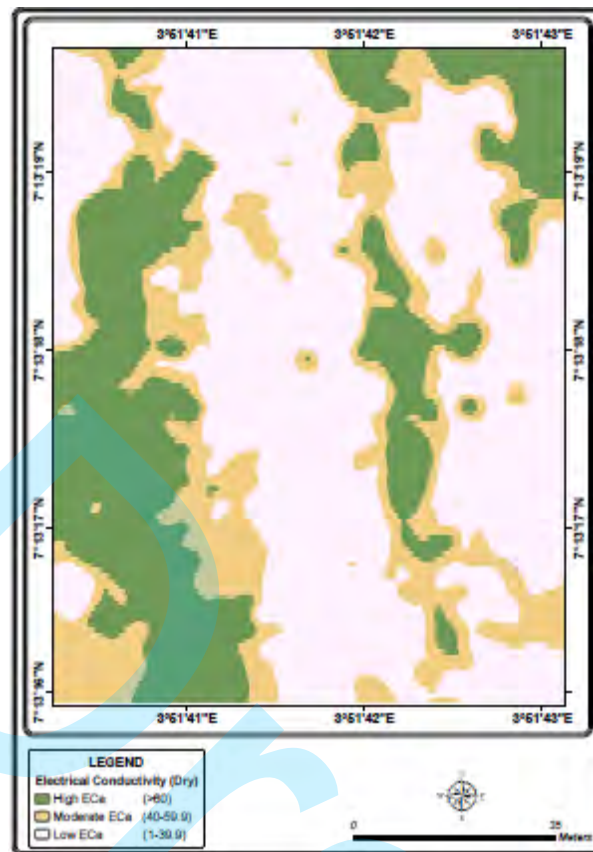


Figure 7: The spatial variation of the apparent electrical conductivity in cacao farm during dry season.

3.2 Volumetric Water Content (VWC) of Soils

The raw data were analyzed (Table 4) and the degrees of their variability were established by comparing with the variation model (Table 2). Variation of VWC during wet spell in the cacao field was moderate (53.84 %) and its variation in dry period was also moderate (33.40 %) but there was significant reduction in its numerical value compared with the value obtained in the wet season.

The prevailing VWC was approximately 26 % in wet season while it was ~10 % at the climax of dry time; this showed that a quarter of soil volume was filled with water at the peak of wet period whereas less soil water was made available for plant up take during the dry season. This invariably contributed to the crop yield as fewer nutrients were supplied to the plant, due to reduction in soil moisture content and its sparse distribution (Ryšán and Šařec 2008). The spatial distribution of volumetric water content was used in classifying the zones into low, moderate, and high VWC (Figs. 8 and 9). There is an increase in area covered by low VWC during the dry season as a result of reduction in soil moisture. This shows that the water retention capacity around this soil is low, also ions mobility will be reduced and this could impede availability of soil nutrient for plant consumption.

Table 4: Statistical analyses of volumetric water content (VWC) in cacao field

Variable	Number of investigated points	Minimum	Maximum	Mean	Standard Deviation	Coefficient of variation (%)
Wet Season						
VWC (%)	912	3.00	69.00	25.52	13.95	53.84
Dry Season						
VWC (%)	906	2.00	26.00	9.70	3.24	33.40

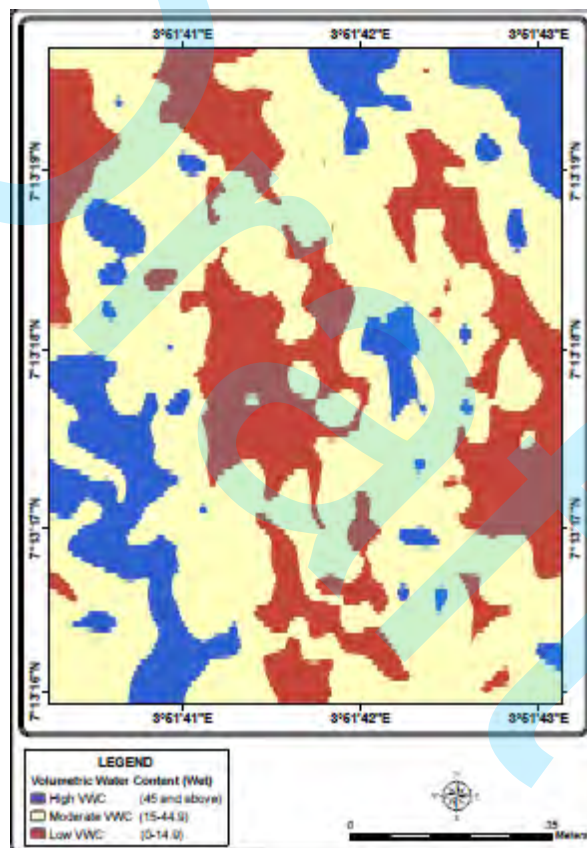


Figure 8: The spatial variation of the volumetric water content in cacao farm during wet season.

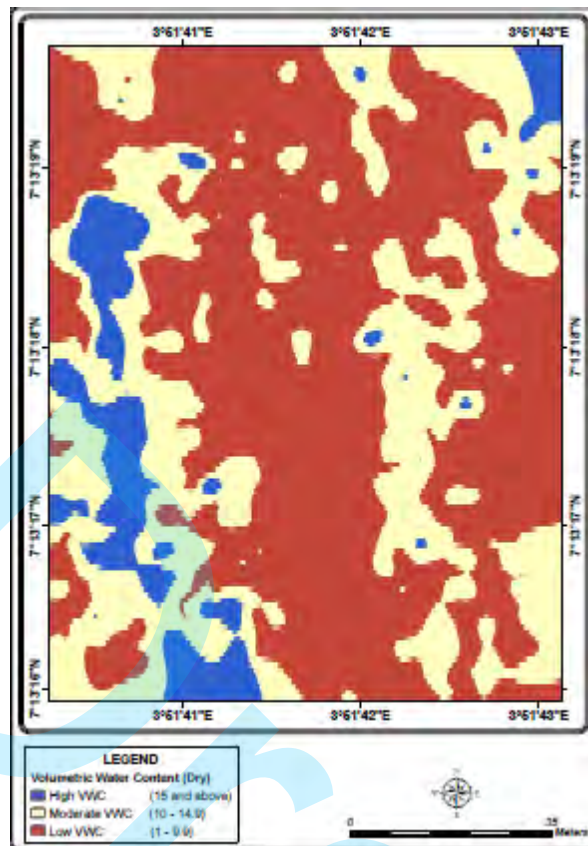


Figure 9: The spatial variation of the volumetric water content in cacao farm during dry season.

3.2.1 Correlation Analysis between Volumetric Water Content and Electrical Conductivity

Regression analysis has been the norm in evaluating the relationship between soil water content and apparent electrical conductivity (EC_a) values in precision agriculture in order to establish the influence of soil moisture on electrical conductivity (Brevik *et al.*, 2006; Ali *et al.*, 2009; Hossain *et al.*, 2010 and Ekwue and Bartholomew, 2011).

Figure 10 shows that VWC rises together with the EC_a and strong coefficient of correlation (0.972) was observed. A small change in moisture content leads to greater change in conductivity. Pedrera-Parrilla *et al.* (2016) and Samouëlian *et al.* (2005) also made known that such fit exists between electrical conductivity and soil water content. The total ion constituents increase with increase in moisture content at extraction and capability of soil solution to conduct electrical current depends on the concentration of ions in the solution (Ryšán and Šařec 2008; Corwin and Yemoto, 2017). Also the air occupying the voids is replaced with water invariably increasing the electrical conductivity of the medium. Ions are transferred from the soil materials to the water where they contribute to the electrical conduction. Once the water is removed, they return to the particles around them (Chenhui *et al.*, 2013).

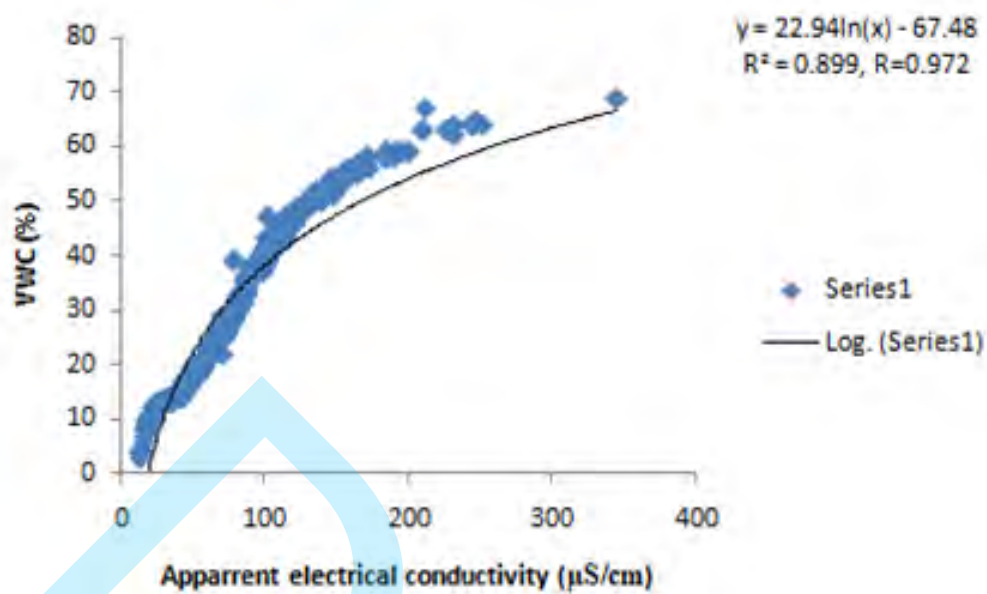


Figure 10: Relationship between VWC and the EC_a in the cacao farm during wet season

During the dry season, a strong relationship was also observed from the interaction of these parameters having a coefficient of 0.807 (Fig. 11). This showed that the EC_a increase as the VWC increases during dry period and a non-linear relationship was observed between EC_a and VWC (McCutcheon *et al.*, 2006; Bhatt and Jain, 2014; Asif *et al.*, 2016). Soil moisture aids the mobility of ions in solution, as the soil moisture reduces, decrease in EC_a values were noted and this is consistent with the works of Doerge (1999); McCutcheon *et al.*, 2006; Kizito *et al.* (2008) and Costa *et al.* (2014) and Wang *et al.*, (2017).

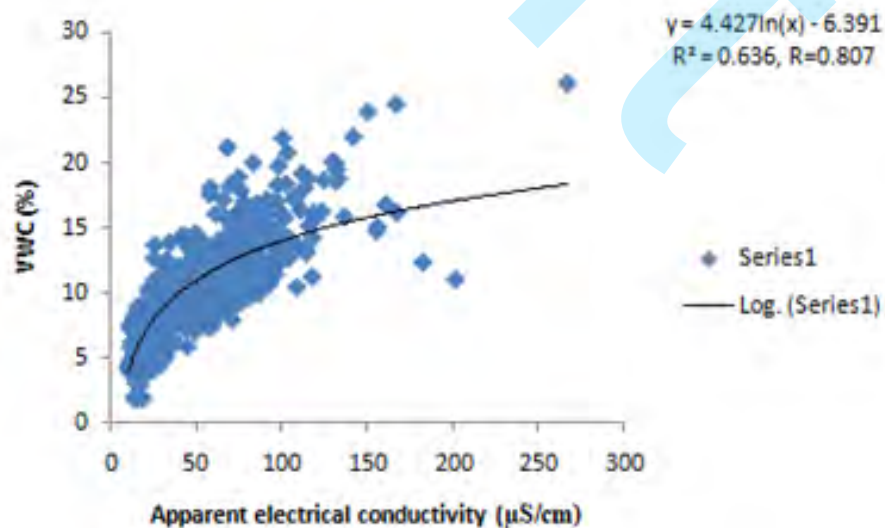


Figure 11: Relationship between VWC and the EC_a in the cacao farm during dry season

3.3 Soil Textural Assessment of the Cacao Farm

Clay particles ranged from 4.8g/kg to 26.8 g/kg with a mean distribution of 12g/kg; proportion of silt fractions range from 5.4 g/kg to 24.8 g/kg and its average composition was 15g/kg; the amount of sand material in soil varies from 57.8g/kg to 87.8g/kg (Table A1). Particle size data were subjected to variability test using Warrick and Nielsen (1980) classification (Table 2), the distribution of clay particle is within the moderate class (33%), also silt fraction is in the class of moderate proportion (25%) while the proportion of sand size has low variability (8%) suggesting nearly uniform distribution in the cacao farm.

Three soil texture classes were established from grain size distribution in table A1, these include sandy loam (41), loamy sand (9) and sandy clayey loam (1) with percentage distribution of 80%, 18% and 2% respectively (Fig. 12). Region of high EC_a has soil classes ranging from sandy loam to sandy clayey loam whereas loamy sand to sandy loam class was inherent in the moderate and low EC_a segments. Khadka *et al.* (2018) reported that soil with sandy loam texture is satisfactory for most of agricultural purposes.

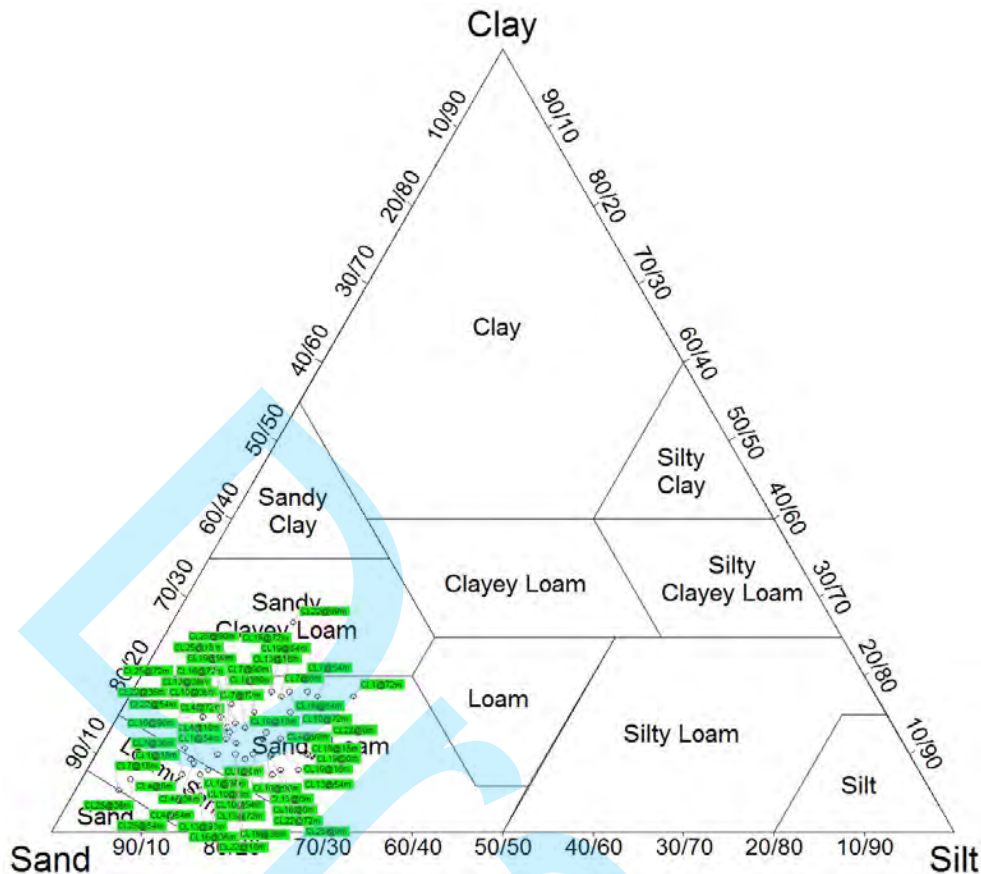


Figure 12: Soil textural classes of soils in cacao farm using Schoeneberger *et al.*, (2012) classification

3.3.1 Particle Size Variation at EC_a Sections in the Cacao Farm

At low EC_a section clay distribution ranged from 6.0 g/kg to 18 g/kg; the silt component in the soil varied from 5.4 g/kg to 23.4 g/kg while its sand proportion varied between 65.8 g/kg and 87.8 g/kg. Particle size computation for the soil samples taken at the moderate EC_a section shows that the clay size is between 7.4 g/kg and 18.0 g/kg; silt fraction varies from 9.4 g/kg to 21.4 g/kg whereas the sand fraction in soils from this segment ranged from 62.6 g/kg to 79.8 g/kg. In the region of high EC_a , the clay size varies between 9.8 g/kg and 26.8 g/kg; the silt fraction has its content ranging from 12.8 g/kg to 24.8 g/kg whereas sand particle size ranges from 57.8 g/kg to 73.8 g/kg. Considering the mean distribution of the soil particles (Fig. 13), it revealed that areas of low EC_a are characterised with less content of finer soil textures than the moderate and high EC_a zones, it tends to be more porous, permit faster water infiltration into lower soil horizons, therefore, it is prone to low water holding capacity and less retention of soil nutrients as a result of low clay content leading to low soil fertility (Ritchey *et al.*, 2015; Jaja, 2016 and Mukungurutse *et al.*, 2018).

Soils in the low EC_a section have sandier textures than the moderate EC_a and high EC_a sections; they hold less water and less nutrients because they are prone to nutrients' leaching (Botta, 2015). High clay content was observed in the moderate (13 g/kg) and high EC_a (15 g/kg) sections, these soil

particles retain more water than the low EC_a portion due to the presence of small pores with capacity to hold more soil nutrient (Botta, 2015).

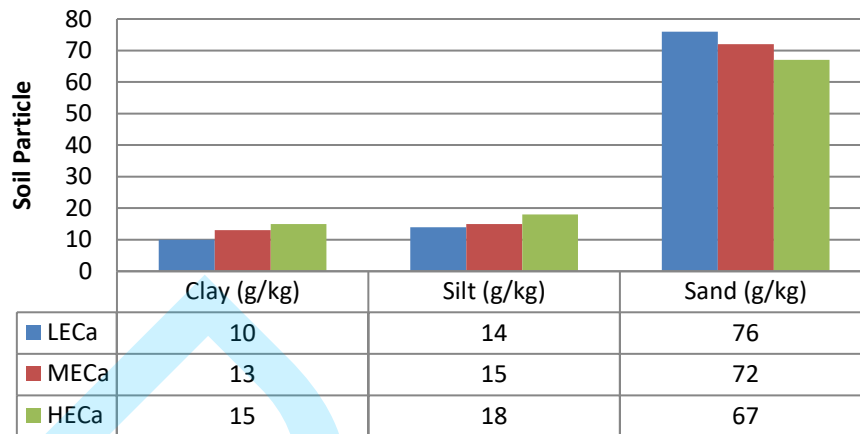


Figure 13: Mean distribution of soil particles at different EC_a sections in the cacao farm

3.3.2 Relationship between Soil Particle Size and Apparent Electrical Conductivity (EC_a) in the Cacao Farm

An attempt was made to examine the soil particles influencing the apparent electrical conductivity of soil measured during the wet and dry seasons.

A moderate positive correlation coefficient (0.391) was observed between clay content and apparent electrical conductivity (EC_a) in the wet period, suggesting that as the clay fraction increases the EC_a also rises (Fig. 14) and agrees with the results of Gholizadeh *et al.*, (2012). Rise in EC_a values was also noted as the proportion of silt particle size increases across the soil unit (Fig. 15), and a moderate correlation coefficient of 0.458 was generated from their relationship (Chaudhari *et al.*, 2014). Figure 16 shows the interaction between EC_a and sand fraction to be a moderate negative coefficient (-0.562), it can be inferred that EC_a values tend to be reduced across soil unit with abundant sand proportion compared to portion of lower sand quantity (Chaudhari *et al.*, 2014). Interaction between fine fraction (clay+silt) and EC_a indicates a moderate positive coefficient (0.562) occurring between these parameters (Fig. 17).

EC_a data acquired during the dry season were also related with the soil particle size to access their relationship. Relating EC_a with the clay content (Fig. 18), a weak positive correlation coefficient (0.326) was generated, indicating that an increase in clay content leads to rise in EC_a value measured on cacao plot (Heil and Schmidhalter, 2017). A weak positive coefficient (0.318) is noted from the interaction of EC_a with silt content in figure 19, suggesting that soils with increasing silt fractions tend to have high EC_a value. Evaluating the relationship between EC_a and sand fraction in figure 20, increase in sand fraction is noted with decrease in EC_a value measured in the farm and its

correlation coefficient is -0.427 (Korsaeth, 2005). Coefficient of correlation determined from the interaction of EC_a with the fine fraction (Fig. 21) was a moderate positive correlation (+0.427). Relating the EC_a with the soil particles has shown that a better correlation was established with these variables in the wet season than in the dry season. This is due to the presence higher soil moisture in the wet season than dry period, thus promoting the mobility of ions in solution as extracted from soil particle and aiding the conductivity.

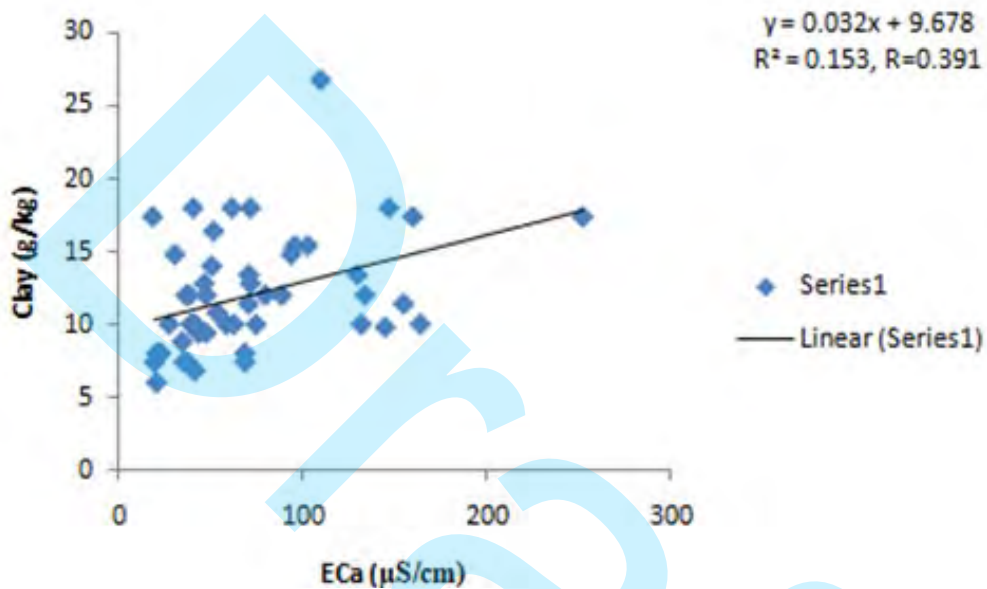


Figure 14: Plot of EC_a versus clay fraction in the cacao farm during the wet season

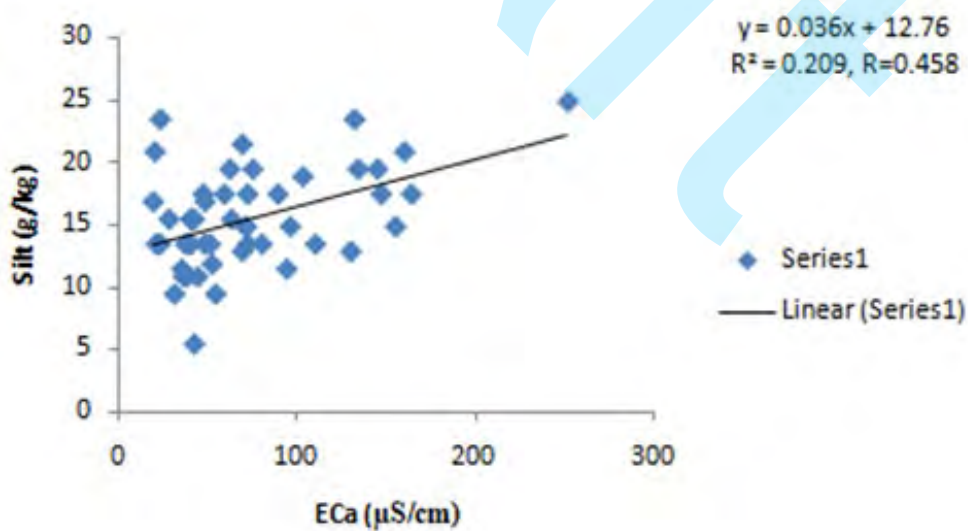


Figure 15: Plot of EC_a versus silt fraction in the cacao farm during the wet season

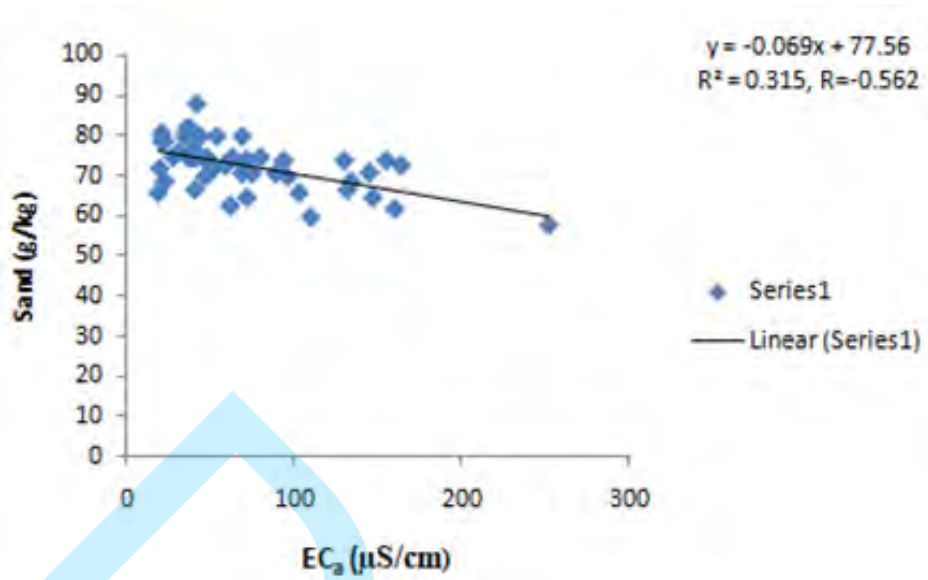


Figure 16: Plot of EC_a versus sand fraction in the cacao farm during the wet season

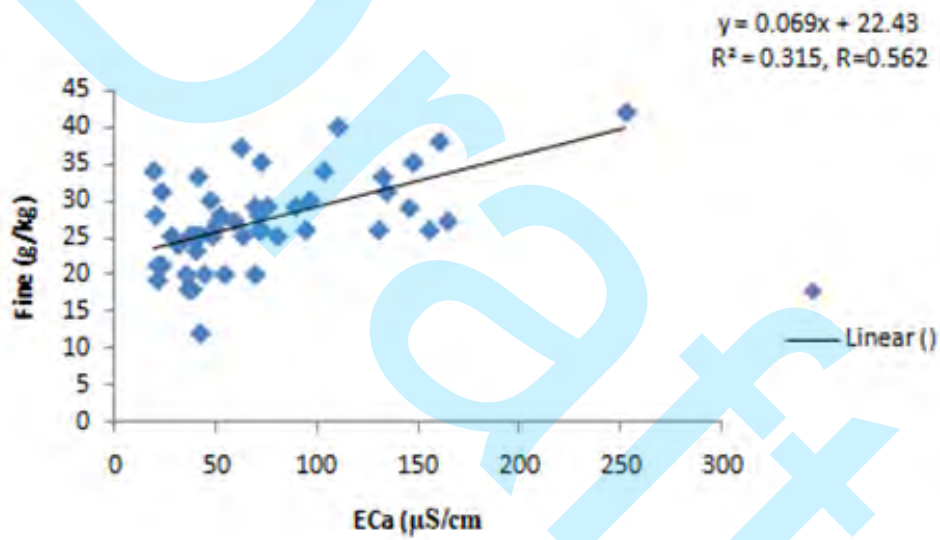


Figure 17: Plot of EC_a versus fine fraction in the cacao farm during the wet season

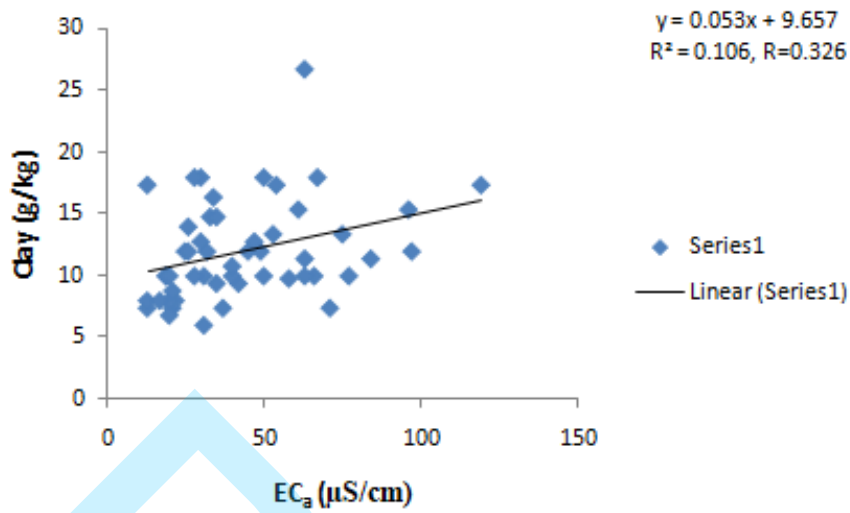


Figure 18: Plot of EC_a versus clay fraction in the cacao farm during the dry season

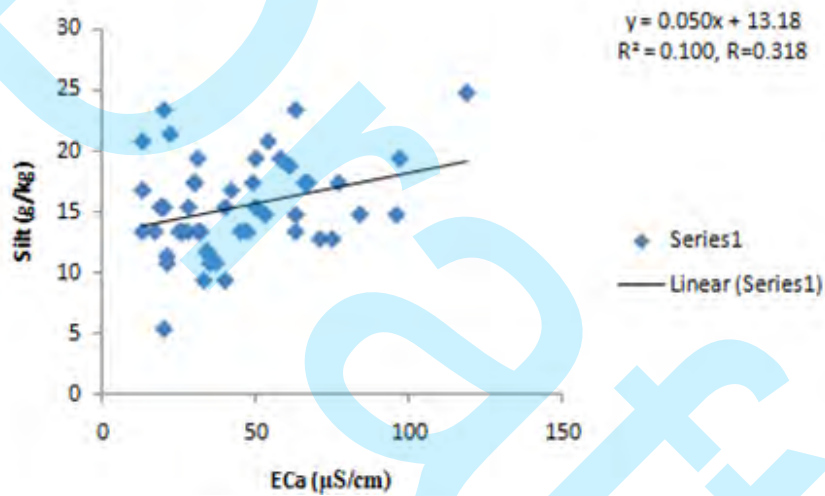


Figure 19: Plot of EC_a versus silt fraction in the cacao farm during the dry season

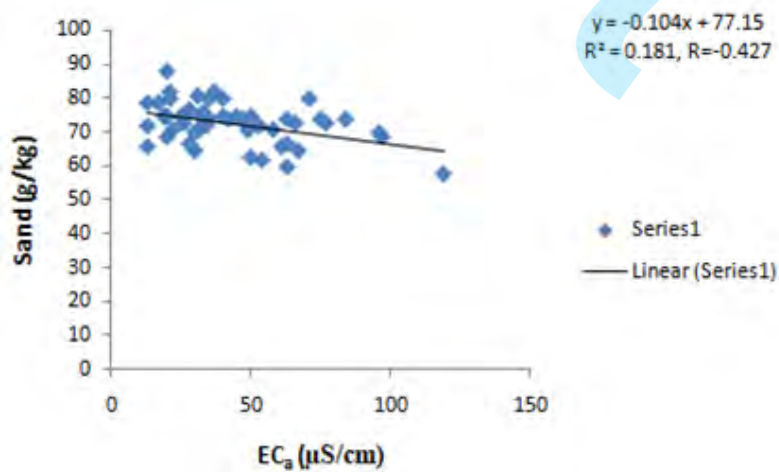


Figure 20: Plot of EC_a versus sand fraction in the cacao farm during the dry season

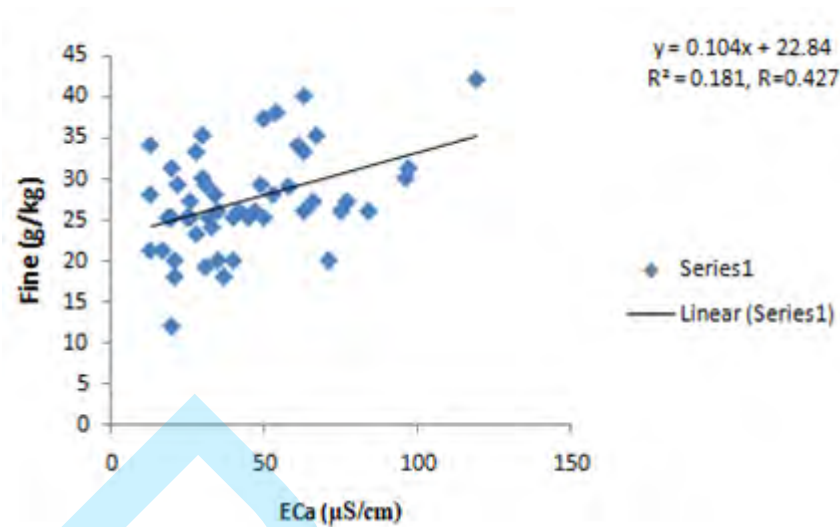


Figure 21: Plot of EC_a versus fine fraction in the cacao farm during the dry season

Evaluating soil's productivity from its textural classes in the regions of low, moderate and high EC_a (Figures 22-24) with respect to the result of the electrical conductivity assessment of the soil has helped to delineate sections classified to be productive, partly productive and non-productive. EC_a analysis was corroborated with the soil textural variation within the cacao plot. The dominant soil texture class across the entire farm is sandy loam as determined from USDA soil texture triangle.

The region of low EC_a was characterised with low proportion of clay and silt contents and high proportion of sand fraction whereas the moderate EC_a segment has more content of clay and silt, and less of sand particles than the low EC_a portion. High EC_a areas were noted with a greater proportion of clay & silt and far less of sand compared to the low and moderate EC_a regions. Soils in high EC_a region have high proportion of fine particles (clay and silt) than other regions; they have the ability to retain more water, soil nutrient and are less prone to nutrient leaching due to the presence of small pores (Sharu *et al.*, 2013; Amos-Tautua *et al.*, 2014). Relationship between the EC_a data measured in wet and dry seasons and soil particle has shown that EC_a values increase in soil with high proportion of clay and silt and less of sand fraction and vice versa.

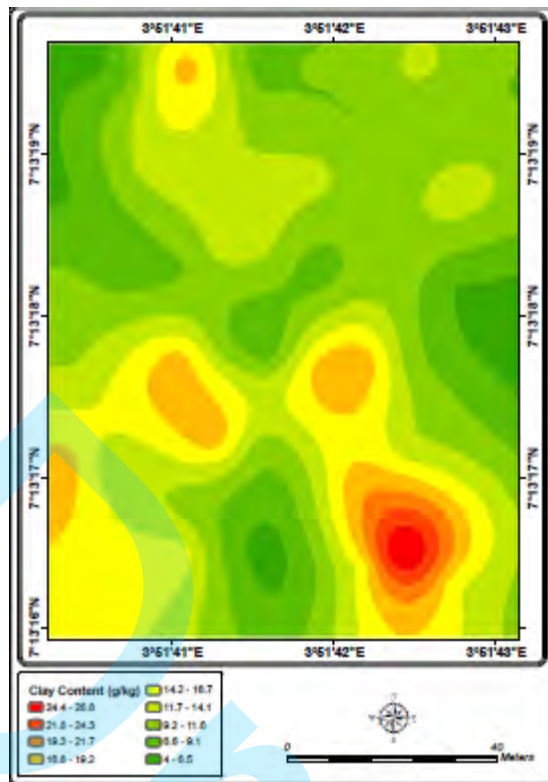


Figure 22: The spatial variation of the clay content in cacao farm

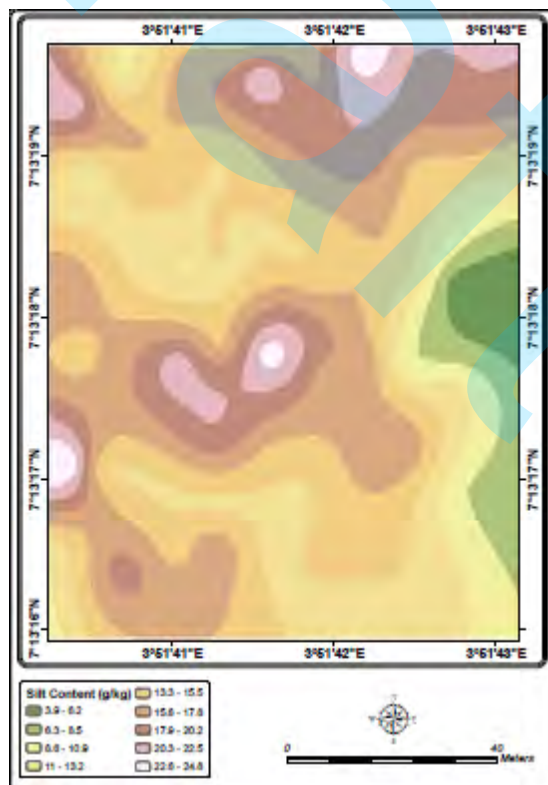


Figure 23: The spatial variation of the silt content in cacao farm

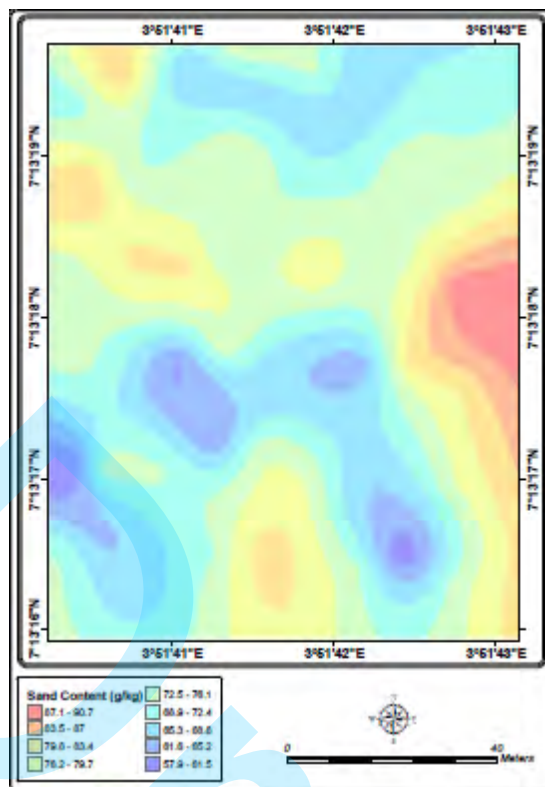


Figure 24: The spatial variation of the sand content in cacao farm

3.4 Falling Head Permeability Assessment of Soils in the Cacao Farm

Table A2 showed the computation of falling head hydraulic conductivity performed on selected soil samples in the farm. Table A3 showed a typical breakdown of hydraulic conductivity of already established soils. Soils from high electrical conductivity section are characterized with permeability coefficient ranging between 4.110×10^{-5} cm/sec and 6.570×10^{-4} cm/sec. It was classified to be silty sand (Terzaghi and Peck, 1967) with relative permeability signifying low hydraulic conductivity. For soil with 6.540×10^{-4} cm/sec coefficient of permeability (moderate EC_a), it was categorized to be silty sand and its relative permeability of this material was low. Soils (low EC_a) of high permeability (1.870×10^{-4} - 6.660×10^{-4} cm/sec) have their permeability classes to be low and soils within this category were regarded as silty sands. Comparing the numerical coefficients, the permeability coefficients in soils of high EC_a were lower in contrast to the moderate and low EC_a segments.

3.4.1 Soil Permeability and Infiltration Rate in the Cacao Plot

The permeability coefficients were used in classifying the soil permeability based on its infiltration rate (Table A4). High EC_a section has the permeability ranging from 4.110×10^{-5} cm/sec to 6.570×10^{-4} cm/sec and it can be categorized as very slow to moderately slow. Permeability of 6.540×10^{-4} cm/sec was obtained in the moderate electrical conductivity segment designated as moderate infiltration. The soils (1.870×10^{-4} - 6.660×10^{-4} cm/sec) in electrically less conductive section were classified as

moderate slow to moderately rapid infiltration. The technique classified soils of high EC_a section to be silt and silty sand while in the medium EC_a segment, it is also silty sand. Values obtained from soils in low EC_a section indicate textural composition of fine sand to silty sand content.

4.0 CONCLUSION

Distribution of EC_a varies significantly with the volumetric water content such that the area of high EC_a corresponds to high VWC and vice versa. EC_a is useful in predicting water content in soils due to the strong correlation coefficients generated with these variables. Loamy sand, sandy loam and sandy clayey loam were three soil textural classes identified from the farm. Soils in the region of the high EC_a have high clay and silt fractions and low sand constituent. Soil with high clay fraction favours nutrient retention as well as the ability to retain soil water and vice versa. Areas of large quantity of clay and silt contents have high EC_a value and low permeability resulting in higher water-holding capability and nutrient retention capacity than the moderate and low EC_a parts which are characterised with quick water drain leading to leaching of soil nutrient. Fine fractions have a large surface area than the coarse fragment of less surface area, thereby resulting in a large catchment/retention area for water and soil nutrients in solution. Low permeable soil has high nutrient retention and high water holding capacity, thereby preventing leaching of soil nutrients. Highly permeable soils in low EC_a permit low nutrient withholding as water drained easily through it, this is responsible for the less cacao pod production.

The electrical conductivity technique can be used to map out areas of soil water, textural and permeability variations. This study has shown that the use of physical parameters is relevant and efficient in delineating agricultural soil nutrients unpredictability. It should be adapted into agricultural farming practices as a rapid tool in assessing the management soil zones.

ACKNOWLEDGEMENT

The authors are grateful to the management of Cocoa Research Institute of Nigeria, Ibadan (CRIN) for granting the permission to use the cacao farm for this study.

REFERENCES

- Advanced Geosciences Inc. (AGI) 2017. Wenner Array: Electrical Resistivity Methods, Part 1. Accessed on 16th June, 2022 from <https://www.agiusa.com/wenner-array>
- Ali B., Cengiz K. and Hasan E., 2009. Measurements of apparent electrical conductivity and water content using a resistivity meter. *International Journal of Physical Sciences* 4.12: 784-795.
- Amos-Tautua B.M.W., Onigbinde A.O. and Ere D. 2014. Assessment of some heavy metals and physicochemical properties in surface soils of municipal open waste dumpsite in Yenagoa, Nigeria. *African Journal of Environmental Science and Technology* 8.1: 41-47.

- Asif A.R., Ali S.S., Noreen N., Ahmed W., Khan S., Khan M.Y. and Waseem M., 2016. Correlation of electrical resistivity of soil with geotechnical engineering parameters at Wattar area district Nowshera, Khyber Pakhtunkhwa, Pakistan. *Journal of Himalayan Earth Sciences* 49.1: 124-130.
- Bai W., Kong L. and Guo A., 2013. Effects of physical properties on electrical conductivity of compacted lateritic soil. *Journal of Rock Mechanics and Geotechnical Engineering* 5: 406-411. <http://dx.doi.org/10.1016/j.jrmge.2013.07.003>
- Bhatt S. and Jain P.K., 2014. Correlation between electrical resistivity and water content of sand. © a statistical approach. *American International Journal of Research in Science, Technology, Engineering and Mathematics* 6.2: 115-121.
- Bilskie J. 2001. Soil water status: content and potential. Campbell Scientific, Inc, App. Note:2s-1. Accessed on 7th July, 2016.
- Botta C. 2015. Understanding your soil test step by step. Yea River Catchment Landcare Group. 1-49.
- Bozkurt A., Kurtulus C. and Endes H., 2009. Measurements of apparent electrical conductivity and water content using a resistivity meter. *International Journal of Physical Sciences* 4.12: 784-795.
- Braja M.Das (2010): Principles of Geotechnical Engineering 7th edition. Cengage Learning, pg164
- Brevik E C., Fenton T.E. and Lazari A., 2006. Soil electrical conductivity as a function of soil water content and implications for soil mapping. *Precision Agric.* 7: 393-404.
- Brillante L., Mathieu O., Bois B., van Leeuwen C. and Lévêque J., 2015. The use of soil electrical resistivity to monitor plant and soil water relationships in vineyards. *Soil* 1: 273–286.
- Chaudhari P.R., Ahire D.V., Chkravarty M. and Maity S. 2014. Electrical conductivity as a tool for determining the physical properties of Indian soils. *International Journal of Scientific and Research Publications* 4(4):1-4.
- Chenhui L., Libo Z., Jinhui P., Chandrasekar S., Bingguo L., Hongying X., Junwen Z. and Lei X., 2013. Temperature and moisture dependence of the dielectric properties of silica sand. *Journal of Microwave Power and Electromagnetic Energy* 47.3:199-209. doi: 10.1080/08327823.2013.11689858
- Corwin D.L. and Lesch S.M., 2005a. Apparent soil electrical conductivity measurements in agriculture. *Computers and Electronics in Agriculture* 46: 11–43.
- _____ 2005b. Characterizing soil spatial variability with apparent soil electrical conductivity part II. Case study. *Computers and Electronics in Agriculture* 46: 135-152.
- Corwin D.L. and Lesch S.M., 2013. Protocols and Guidelines for Field-scale Measurement of Soil Salinity Distribution with EC_a-Directed Soil Sampling. *Journal of Environmental and Engineering Geophysics* 18.1: 1–25.
- Corwin D.L. and Yemoto K., 2017. Salinity: electrical conductivity and total dissolved solids. *Methods of Soil Analysis* 2. Retrieved on 18th November, 2019 from doi:10.2136/mta2015.0039

- Costa M.M., Queiroz D.M., Pinto F.A.C., Reis E.F.D. and Santos N.T., 2014. Moisture content effect in relationship between apparent electrical conductivity and soil attributes. *Acta Scientiarum Agronomy* 36.4: 395-401.
- Doerge T., 1999. Defining management zones for precision farming. *Crop Insights* 8.21: 1-5.
- Edwards L.S., 1977. A modified pseudosection for resistivity and induced polarization. *Geophysics* 42: 1020-1036.
- Ekwue E.I. and Bartholomew J., 2011. Electrical conductivity of some soils in Trinidad as affected by density, water and peat content. *Biosystems Engineering* 108: 95-103.
- Elhakim A.F., 2016. Estimation of soil permeability. *Alexandria Engineering Journal* 55: 2631-2638.
- Gholizadeh A., Soom M.A.M., Anuar A.R. and Wayayok Aimrun W., 2012. Relationship between apparent electrical conductivity and soil physical properties in a Malaysian paddy field. *Archives of Agronomy and Soil Science*, 58(2):155-168. <http://dx.doi.org/10.1080/03650340.2010.509132>
- Hawkins E., Fulton J. and Port K., 2017. Using soil electrical conductivity (EC) to delineate field variation. College of Food, Agricultural and Environmental Sciences, Ohio State University. Retrieved on 20th December, 2017 from <https://ohioline.osu.edu/factsheet/fabe-565>.
- Heil K. and Schmidhalter U. 2017. The application of EM38: determination of soil parameters, selection of soil sampling points and use in agriculture and archaeology. *Sensors*, 17:2540. doi:10.3390/s17112540
- Hossain M.B., Lamb D.W., Lockwood P.V. and Frazier P., 2010. EM38 for volumetric soil water content estimation in the rootzone of deep vertosol soils. *Computers and Electronics in Agriculture* 74:100-109.
- Jaja N. 2016. Understanding the texture of your soil for agricultural productivity. Virginia State University, Virginia Cooperative Extension, publication CSES-162P. Retrieved on 30th August 2019 from www.ext.vt.edu.
- Khadka D., Lamichhane S., Bhandari P., Ansari A.R., Joshi S. and Baruwal P. 2018. Soil fertility assessment and mapping of chungbang farm, Pakhribas, Dhankuta, Nepal. *Advances in Plants and Agricultural Research* 8.3: 219–227. doi: 10.15406/apar.2018.08.00317
- Khattak R.A. and Hussain Z., 2007. Evaluation of soil fertility status and nutrition of orchards. *Soil & Environ.* 26.1: 22-32
- Kirkby, A., Heinson G. and Krieger L., 2016. Relating permeability and electrical resistivity in fractures using random resistor network models, *Journal of Geophysical Research Solid Earth* 121: 1546–1564. doi:10.1002/2015JB012541.
- Kizito F., Campbell C.S., Campbell G.S., Cobos D.R., Teare B.L., Carter B., and Hopmans J.W., 2008. Frequency, electrical conductivity and temperature analysis of a low cost capacitance soil moisture sensor. *Journal of Hydrology* 352: 367-378.

- Korsaeth A. 2005. Soil apparent electrical conductivity (EC_a) as a means of monitoring changes in soil inorganic N on heterogeneous morainic soils in SE Norway during two growing seasons. *Nutrient Cycling in Agroecosystems* 72: 213–227. DOI 10.1007/s10705-005-1668-6
- Lide D.R., 2007. CRC Handbook of Chemistry and Physics, 88th edition. CRC Press, London. 5-71.
- Marshall W.L., 1987. Electrical conductance of liquid and supercritical water evaluated at 0°C and 0.1 MPa to high temperatures and pressures: reduced-state relationships. *Journal of Chemical and Engineering Data* 32: 221-226.
- McCutcheon M.C., Farahani H.J., Stednick J.D., Buchleiter G.W. and Green T.R., 2006. Effect of Soil Water on Apparent Soil Electrical Conductivity and Texture Relationships in a Dryland Field. *Biosystems Engineering*, 94 (1):19–32. doi:10.1016/j.biosystemseng.2006.01.002
- Molin J.P. and Faulin G.D.C., 2013. Spatial and temporal variability of soil electrical conductivity related to soil moisture. *Scientia. Agricola* 70.1: 1-5.
- Mommer L., 1999. The water relations in cacao (*Theobroma cacao* L.): modelling root growth and evapotranspiration. M.Sc. Thesis Department of Theoretical Production Ecology, Wageningen Agricultural University, Netherlands. 57pp
- Moral F.J., Terrón J.M. and Marques da Silva J.R., 2010. Delineation of management zones using mobile measurements of soil apparent electrical conductivity and multivariate geostatistical techniques. *Soil and Tillage Research* 106: 335-343.
- Mukungurutse C.S., Nyapwere N., Manyanga A.M. and Mhaka L. 2018. Pedological characterization and classification of typical soils of Lupane district, Zimbabwe. *International Journal of Plant and Soil Science* 22.3: 1-12. doi: 10.9734/IJPSS/2018/39609
- Nigeria Geological Survey Agency (N. G. S. A.), 2009. The Geological Map of Nigeria. A publication of Nigeria Geological Survey Agency, Abuja, Nigeria.
- Pedreira-Parrilla A., Brevik E. C., Giráldez J. V. and Vanderlinden K., 2016. Temporal stability of electrical conductivity in a sandy soil. *International Agrophysics* 30: 349-357. doi: 10.1515/intag-2016-0005
- Ritchey E., McGrath J. and Gehring D. 2015. Determining Soil Texture by Feel. University of Kentucky College of Agriculture, Food and Environment Cooperative Extension Service AGR-127. Retrieved on 16th July, 2019 from www.ca.uky.edu.
- Ryšan L. and Šařec O., 2008. Research of correlation between electric soil conductivity and yield based on the use of GPS technology. *Res. Agr. Eng.* 54 (3): 136–147.
- Samouëlian, A., Cousin I., Tabbagh A., Bruand A., Richard G., 2005. Electrical resistivity survey in soil science: a review. *Soil & Tillage Research* 83: 173–193
- Scherer T.F., Franzen D., and Cihacek L., 2013. Soil, Water and Plant Characteristics Important to Irrigation. Retrieved on 4th October, 2017 from <https://www.ag.ndsu.edu/publications/crops/soil-water-and-plant-characteristics-important-to-irrigation/ae1675.pdf> AE1675 (Revised).

Schoeneberger P.J., Wysocki D.A., Benham E.C. and Soil Survey Staff. 2012. Field book for describing and sampling soils, Version 3.0. Natural Resources Conservation Service, National Soil Survey Center, Lincoln, NE. ix + 9-14pp. Retrieved on 19th September 2017 from https://www.nrcs.usda.gov/Internet/FSE_DOCUMENTS/nrcs142p2_052523.pdf

Sharu M.B., Yakubu M., Noma S.S. and Tsafe A.I. 2013. Characterization and classification of soils on an agricultural landscape in Dingyadi district, Sokoto state, Nigeria. *Nigerian Journal of Basic and Applied Science* 21.2: 137-147. <http://dx.doi.org/10.4314/njbas.v21i2.9>

Siqueira G.M., Dafonte J.D., Armesto M.V. and Silva E.F.F., 2014. Using multivariate geostatistics to access patterns of spatial dependence of apparent soil electrical conductivity and selected soil properties. *The Scientific World Journal*, 2014: 712403. DOI: dx.doi.org/10.1155/2014/712403 Retrieved on 6th September, 2017

Smarsly K., 2013. Agricultural ecosystem monitoring based on autonomous sensor systems. 2013 Second International Conference on Agro-Geoinformatics (Agro-Geoinformatics) 12-16 Aug. 2013, IEEE. Retrieved on 8th August, 2017 from doi: 10.1109/Argo-Geoinformatics.2013.6621952.

Terzaghi, K. and Peck R.B., 1967. Soil Mechanics in Engineering Practice. New York: J. Wiley and Sons, Inc, 2nd ed., 729pp.

USDA Natural Resources Conservation Service, 2011. Soil Quality Indicators. Retrieved on 19th September, 2017 from <https://www.nrcs.usda.gov/wps/portal/nrcs/detail/soils/health/assessment/?cid=stelprdb1237387>.

Wang J., Zhang X. Du L., 2017. A laboratory study of the correlation between the thermal conductivity and electrical resistivity of soil. *Journal of Applied Geophysics* 145: 12–16.

Warrick A.W. and Nielsen R.R., 1980. Spatial variability of soil physical properties in the field. In: D. Hillel (Ed) Application of soil physics, Academic Press, New York, NY, USA

APPENDIX

Table A1	Particle size distribution with EC _a values for soils in cacao farm
Table A2	Falling head permeability (k) coefficients of some selected soil from cacao farm
Table A3	Classification of soils according to their coefficients of permeability
Table A4	Classification of soil moisture infiltration rate
Table A1:	Particle size distribution with EC _a values for soils in cacao farm

S/N	I.D	Clay (g/kg)	Silt (g/kg)	Sand (g/kg)	EC _a (Wet) $\mu\text{S/cm}$	EC _a (Dry) $\mu\text{S/cm}$
1	CL 1 at 0m	7.4	20.8	71.8	20	13
2	CL 1 at 18m	7.4	10.8	81.8	36	21
3	CL 1 at 36m	9.4	16.8	73.8	48	42
4	CL 1 at 54m	11.4	14.8	73.8	155	84
5	CL 1 at 72m	17.4	24.8	57.8	252	119
6	CL 1 at 90m	16.4	11.8	71.8	52	34
7	CL 4 at 0m	7.4	10.8	81.8	38	37
8	CL 4 at 18m	11.4	14.8	73.8	71	63
9	CL 4 at 36m	7.4	12.8	79.8	69	71
10	CL 4 at 72m	13.4	12.8	73.8	130	75
11	CL 4 at 90m	15.4	18.8	65.8	103	61
12	CL 7 at 0m	17.4	16.8	65.8	19	13
13	CL 7 at 36m	9.4	10.8	79.8	44	35
14	CL 7 at 54m	17.4	20.8	61.8	160	54
15	CL 7 at 72m	13.4	14.8	71.8	71	53
16	CL 7 at 90m	15.4	14.8	69.8	96	96
17	CL 10 at 0m	10	15.4	74.6	40	19
18	CL 10 at 18m	12	13.4	74.6	37	32
19	CL 10 at 36m	12	13.4	74.6	39	25
20	CL 10 at 54m	10	15.4	74.6	28	19
21	CL 10 at 72m	18	19.4	62.6	62	50
22	CL 10 at 90m	10	17.4	72.6	59	66
23	CL 13 at 0m	8	21.4	70.6	69	22
24	CL 13 at 36m	12	13.4	74.6	80	45
25	CL 13 at 54m	8	23.4	68.6	23	20
26	CL 13 at 72m	10	15.4	74.6	40	40
27	CL 13 at 90m	6	13.4	80.6	21	31
28	CL 16 at 0m	10	17.4	72.6	164	77
29	CL 16 at 18m	12	17.4	70.6	89	49
30	CL 16 at 36m	8	13.4	78.6	21	13
31	CL 16 at 54m	18	17.4	64.6	72	30
32	CL 16 at 72m	12	13.4	74.6	48	26
33	CL 16 at 90m	8	13.4	78.6	23	17
34	CL 19 at 0m	10	23.4	66.6	132	63
35	CL 19 at 18m	10	19.4	70.6	75	31
36	CL 19 at 36m	10	15.4	74.6	63	50
37	CL 19 at 54m	18	17.4	64.6	147	67
38	CL 19 at 72m	18	15.4	66.6	41	28
39	CL 19 at 90m	14	13.4	72.6	51	26
40	CL 22 at 0m	12	19.4	68.6	134	97
41	CL 22 at 18m	10	15.4	74.6	42	20
42	CL 22 at 36m	10	13.4	76.6	40	28
43	CL 22 at 54m	10.8	9.4	79.8	54	40
44	CL 22 at 72m	12.8	17.4	69.8	47	30
45	CL 22 at 90m	26.8	13.4	59.8	110	63

Table A1 cont'd

46	CL 25 at 0m	9.8	19.4	70.8	145	58
47	CL 25 at 18m	12.8	13.4	73.8	72	47
48	CL 25 at 36m	6.8	5.4	87.8	42	20
49	CL 25 at 54m	8.8	11.4	79.8	35	21
50	CL 25 at 72m	14.8	9.4	75.8	31	33
51	CL 25 at 90m	14.8	11.4	73.8	94	35
	Mean	12	15	73	71	44
	Std. Dev.	4	4	6	47	24
	CV%	35	27	9	66	56

Table A2: Falling head permeability (k) coefficients of some selected soil from cacao farm

S/N	Coordinate	EC _a region	a (cm ²)	L (cm)	A (cm ²)	Δt (sec)	H ₁ (cm)	H ₂ (cm)	k (cm/sec)
1	7°13'18.5"N 3°51'40.6"E	High	0.159	7	38.49	176	143	26	2.800x10 ⁻⁴
2	7°13'16.8"N 3°51'40.6"E	High	0.159	7	38.49	1200	143	26	4.110x10 ⁻⁵
3	7°13'16.2"N 3°51'41.1"E	High	0.159	7	38.49	384	143	26	1.280x10 ⁻⁴
4	7°13'17.7"N 3°51'41.6"E	Low	0.159	7	38.49	74	143	26	6.660x10 ⁻⁴
5	7°13'19.3"N 3°51'41.4"E	Low	0.159	7	38.49	263	143	26	1.870x10 ⁻⁴
6	7°13'16.6"N 3°51'42.9"E	Medium	0.159	6.5	38.49	70	143	26	6.540x10 ⁻⁴
7	7°13'17.8"N 3°51'42.3"E	High	0.159	7	38.49	75	143	26	6.570x10 ⁻⁴
8	7°13'17.9"N 3°51'41.9"E	Low	0.159	6.8	38.49	112	143	26	4.280x10 ⁻⁴
9	7°13'19.0"N 3°51'43.0"E	High	0.159	7	38.49	450	143	26	1.100x10 ⁻⁴

Table A3: Classification of soils according to their coefficients of permeability (After Terzaghi and Peck, 1967)

S/N	Relative Permeability	Typical Soil	Value of k (cm/s)
1	High	Coarse gravel	$> 10^{-1}$
2	Medium	Sand, fine sand	10^{-1} to 10^{-3}
3	Low	Silty sand, dirty sand	10^{-3} to 10^{-5}
4	Very Low	Silt, fine sandstone	10^{-5} to 10^{-7}
5	Practically impermeable	Clay	$< 10^{-7}$

Table A4: Classification of soil moisture infiltration rate (Modified after Scherer *et al.*, 2013)

S/N	Classification	Infiltration Rate (inches/hour)	Infiltration Rate (cm/s)
1	Very slow	less than 6.000×10^{-2}	$< 4.233 \times 10^{-5}$
2	Slow	6.000×10^{-2} to 2.000×10^{-1}	4.233×10^{-5} to 1.411×10^{-4}
3	Moderately slow	2.000×10^{-1} to 6.000×10^{-1}	1.411×10^{-4} to 4.233×10^{-4}
4	Moderate	6.000×10^{-1} to 2.000×10^0	4.233×10^{-4} to 1.411×10^{-3}
5	Moderately rapid	2.000×10^0 to 6.000×10^0	1.411×10^{-3} to 4.233×10^{-3}
6	Rapid	6.000×10^0 to 2.000×10^1	4.233×10^{-3} to 1.411×10^{-2}
7	Very rapid	greater than 2.000×10^1	$> 1.411 \times 10^{-2}$

OLAOJO A. A.: write the first draft of the manuscript;
OLADUNJOYE M.A.: commented on previous versions of the manuscript; **OLAOJO A. A. and OLADUNJOYE M.A.:** contributed to the study conception and design, material preparation, data collection and analysis, read and approved the final manuscript.